

**SPECIFICATIONS**

**MATERIAL:**


1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold

**ELECTRICAL:**


1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

Shorting Bar



- 1 2 3 4 5 6 7 8 9 10
- 1 10 WITHOUT PIN
  - 2 5 SHORTING BAR
  - 6 9 SHORTING BAR

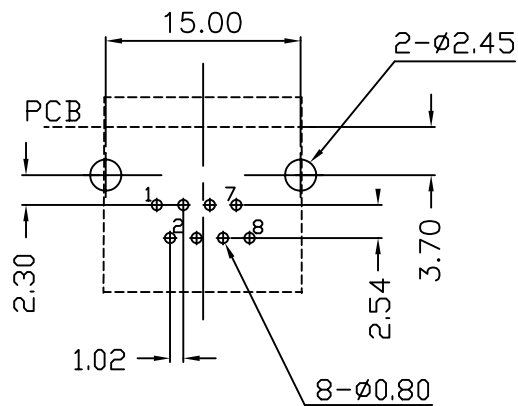

PCB LAYOUT/TOP VIEW



PART NO. **MJ14S-KX06PD-0808**

DWG NO. **MJ14S-KX06PD-0808**

CHECKED BY CY

TOLERANCES ARE

.X ± 0.3  
.XX ± 0.2  
.XXX ±  
AWG

DESCRIPTION:

RJ31X Mini Low Profile Modular Jo

煜倫有限公司


FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE