

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:





HOUSING: PBT OR PA46 OR PA9T, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-**BLACK**.

CONTACTS: PHOSPHOR BRONZE.

2. FINISH:

CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μ m [50 μ "] MIN. NICKEL UNDERPLATED
ALL OVER.

3. "▽" SHOWS QIP INSPECTION POINT.

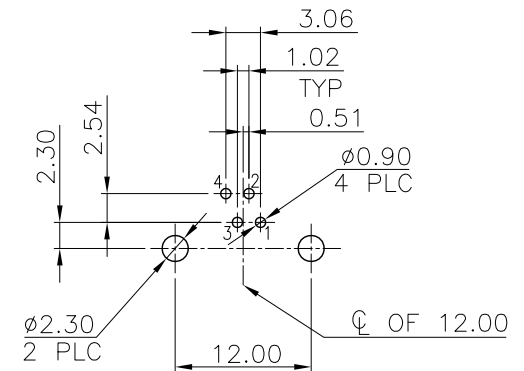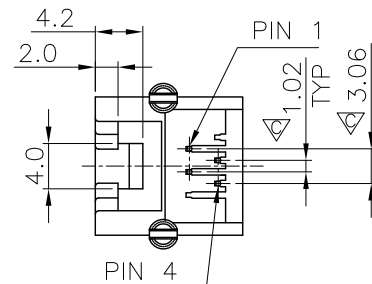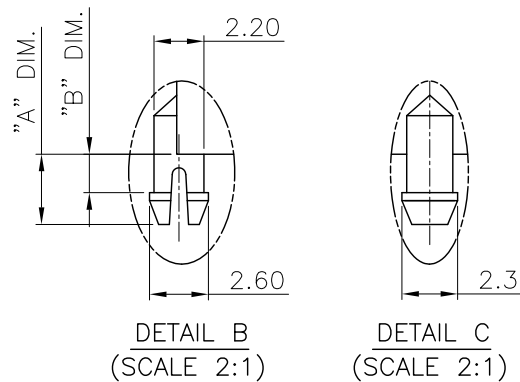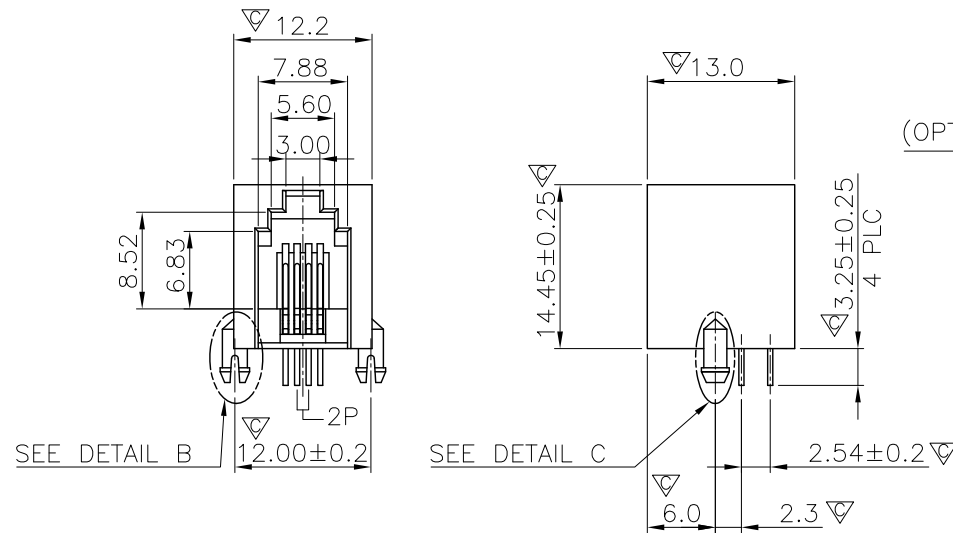

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05 (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MJ14S12-KX06-0404-LF

SERIES

LEADFREE

4P4C

06u" GOLD

NON EAR

BLACK

DESCRIPTION: 6*4POSITION, MINI LOW PROFILE, SIDE ENTRY PCB JACK