
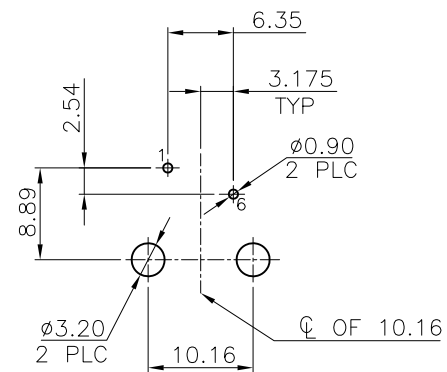

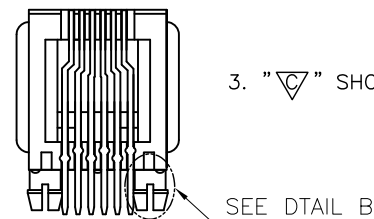


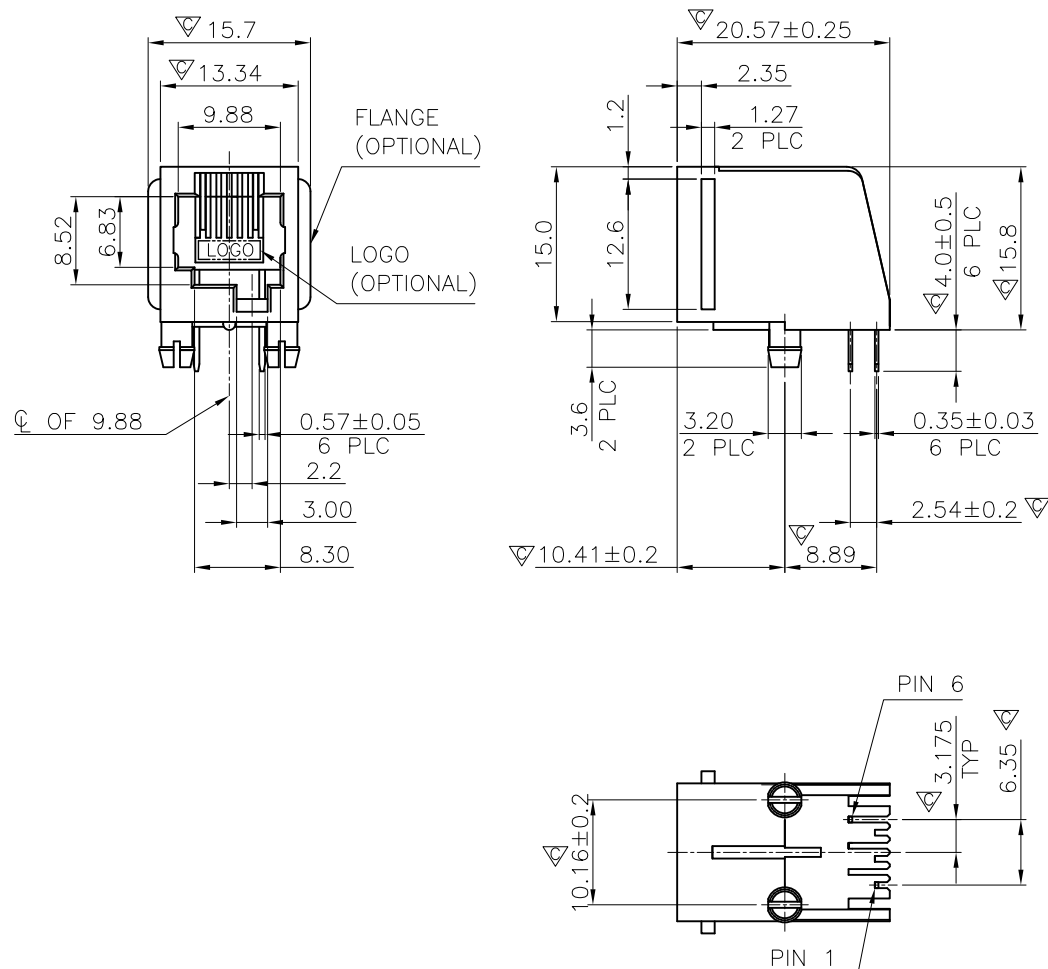

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
HOUSING: PBT OR PA46 OR PA9T, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-GRAY.
CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: GOLD PLATED ON CONTACT AREA,
0.0254 μm [$1\mu''$] GOLD PLATED ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27 μm [$50\mu''$] MIN. NICKEL
3. "▽" SHOWS QIP INSPECTION POINT.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MJ16J-KE06-0602D-LF

SERIES
D TYPE
LEADFREE
6P2C
06u" GOLD
EAR
BLACK

DESCRIPTION: 6POSITION, 90° (SPLIT PEGS), OFF-CENTER, SIDE ENTRY PCB JACK