
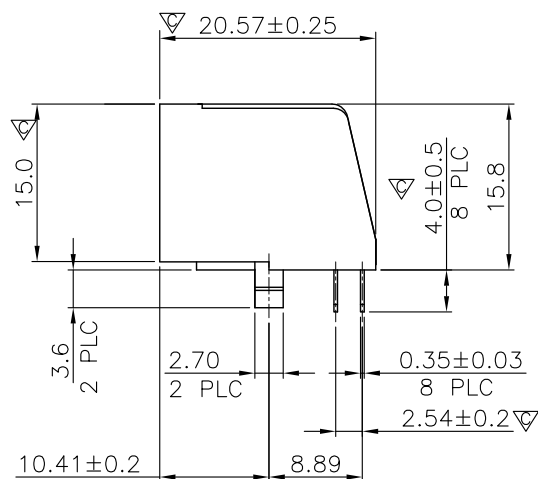
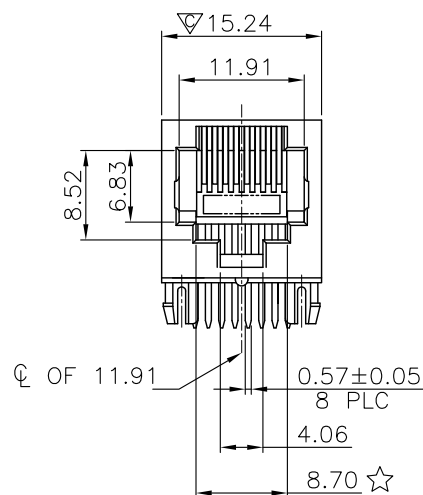


NOTE:


CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
HOUSING: PBT OR PA46 OR PA9T, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: GOLD PLATED ON CONTACT AREA,
0.0254μm [1μ"] GOLD PLATED ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED
1.27μm [50μ"] MIN. NICKEL
3. "▽" SHOWS QIP INSPECTION POINT.

SEE DETAIL B



DETAIL B
SCALE 2:1

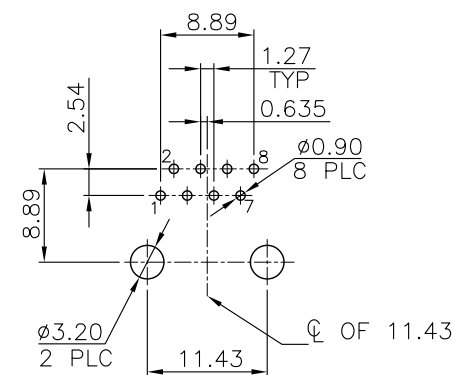

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05 (TOP VIEW)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJ16J-KX06-0808-LF

SERIES

LEADFREE

8P8C

06u" GOLD

NON POST

BLACK

DESCRIPTION: 8POSITION, 90° (SPLIT PEGS), SIDE ENTRY PCB JACK