


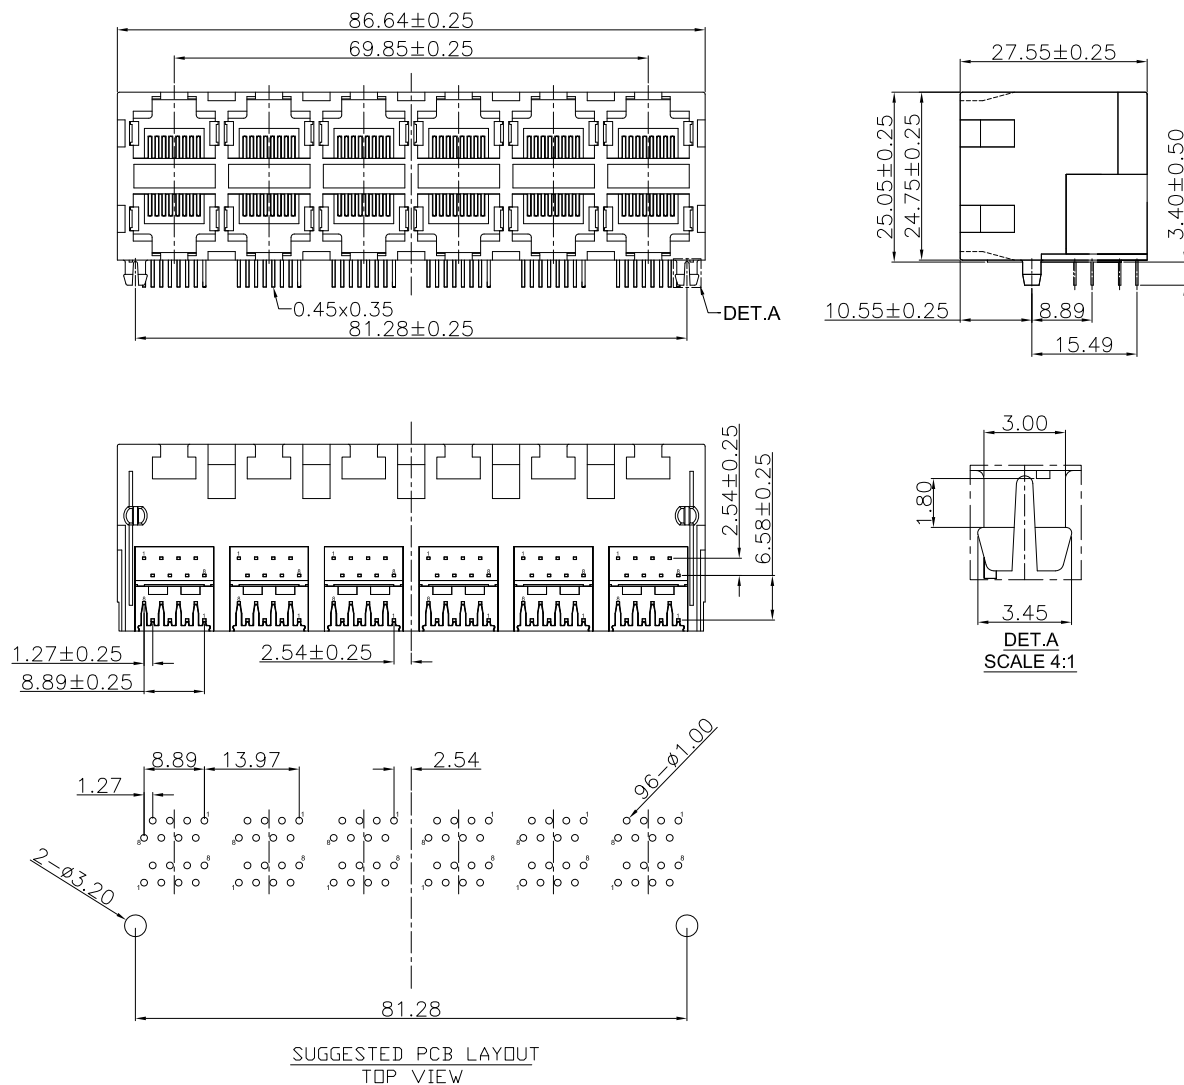

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

2	Terminal	Phosphor Bronze	Contact Area : Gold Plated Solder Area : Tin Plated
1	Housing	PBT	Black,UL94V-0
NO.	NAME	MATERIAL	FINISH

For Wave Soldering Temperature: $260 \pm 5^\circ\text{C}$, 5 sec ma,

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ± 0.15
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJ24B6-KX30T3-0808-LF

SERIES

LEADFREE

8P8C

0.35t

30u" GOLD

NON EAR

BLACK

DESCRIPTION: RJ45 , Unshielded , Receptacle Horizontal , 2x6 Port , Tht