

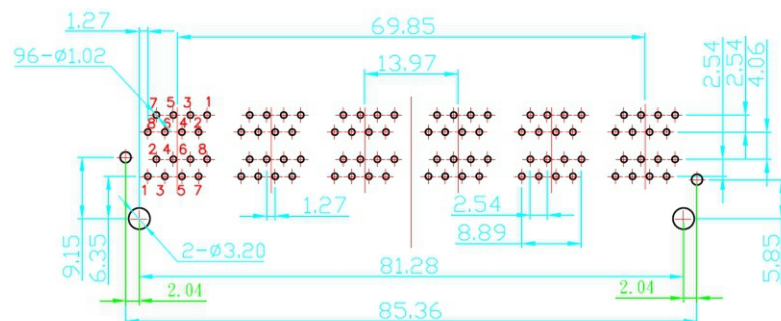
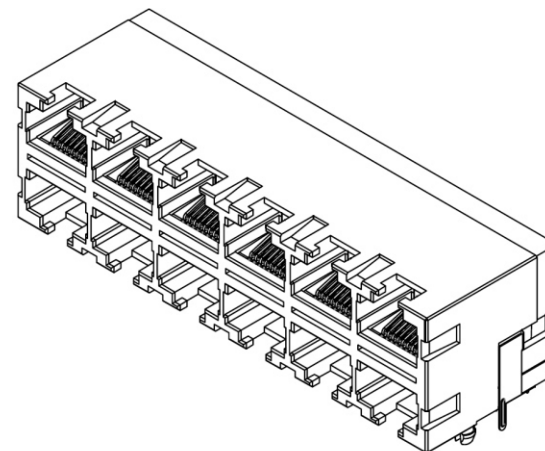

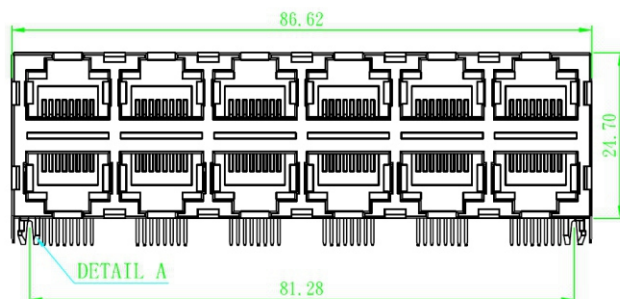


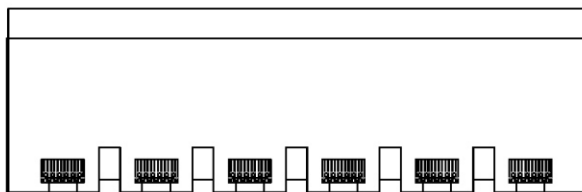

RECOMMENDED P.C.B LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE ± 0.05)



Detail A Scale 4

注:

1. Insert: PA6T+30%G. F BLACK UL94V-0 (RoHS).
 2. Shielding: Copper Alloy with Nickel Plated (RoHS).
 3. Contact: 0.35X0.44mm Phosphor Bronze gold Plating Over Nickel (RoHS).
 4. Welding post: Copper Alloy with Nickel Plated (RoHS).
- ※ MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
※ 凡标注 ▲ 记号为重点尺寸。

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG $\pm$

PPOJECTION



ORDER INFORMATION

MJ24B6-KXxxT3B5-0808-LF

SERIES

8P8C

LEADFREE

REAR TAB 5.85mm

0.35mm

06:06u" GOLD

30:30u" GOLD

BLACK

NON EAR

DESCRIPTION: