
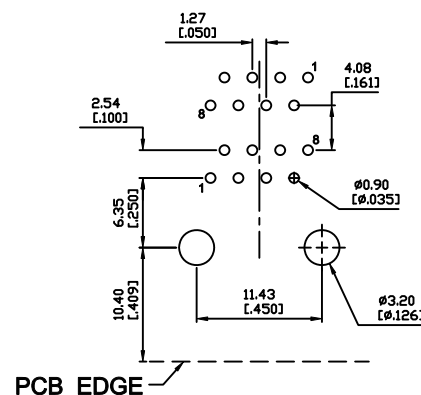
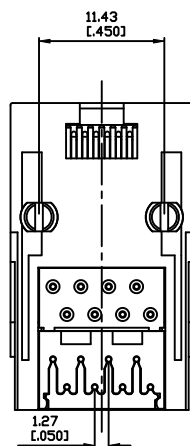
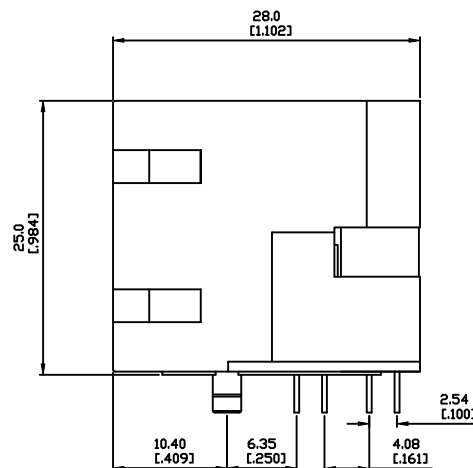


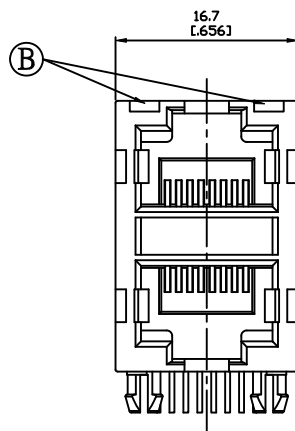

**SUGGESTED PCB LAYOUT
TOP VIEW**

Electrical Characteristics :

Insulation Resistance : 500M Ω Min.

Contact Resistance : 50m Ω Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Mechanical:

Housing : Thermoplastic UL94V-0

Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MJ25B1-KX06-0808-LF

SERIES

8P8C

06u" GOLD

NON EAR

BLACK

LEADFREE

DESCRIPTION: 2X1(2PORTS) RJ45 NON-SHIELDED PCB JACK