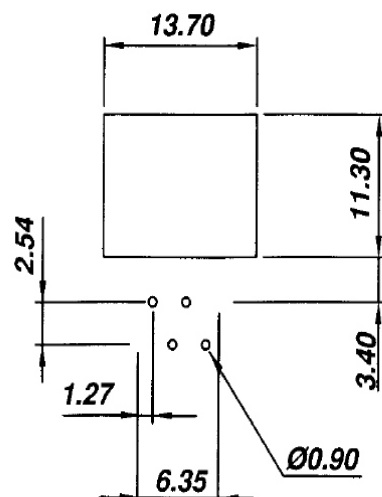

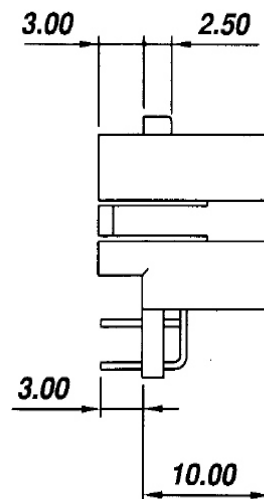
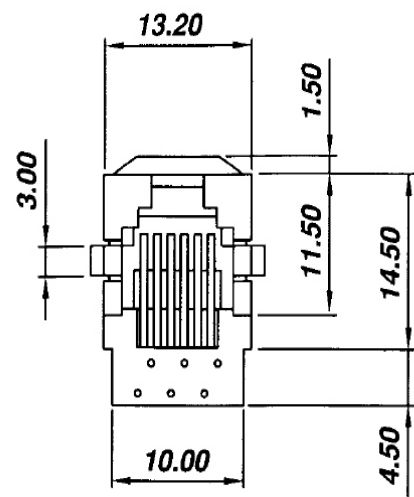


PCB LAYOUT
(Bottom View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.

Contact Resistance : 20milli-Ohm Max.

Rating Current : 1.5A Max.

Rating Voltage : 120V AC

Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing : PBT Glass Filled (UL 94V-0)

Color : Black Color

Spring Wire : 0.45mm Dia. Phosphor Bronze

Gold Plating Over Nickel

Temperature Range : - 25 /+90 Deg C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJB10-KX06-0604-LF

SERIES

6P4C

06u" GOLD

NON POST

BLACK

LEADFREE

DESCRIPTION: