

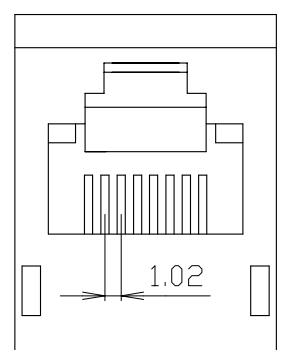
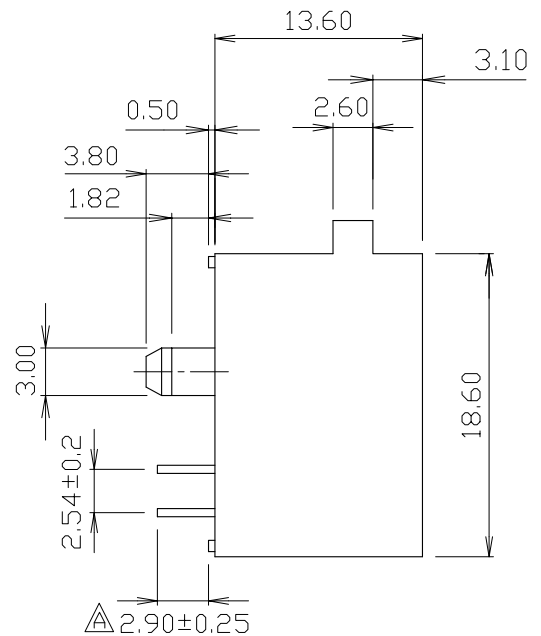


1 2 3 4 5 6 7 8 9 0

MATERIALS:
 • HOUSING-DSM STANYL TE250F6 (NYLON-46)
 HEAT DEFLECTION TEMP.290°
 BLACK COLOR,UL94V-0
 • CONTACTS-0.35mm THICK PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 TIN/LEAD IN SOLDER AREA.
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

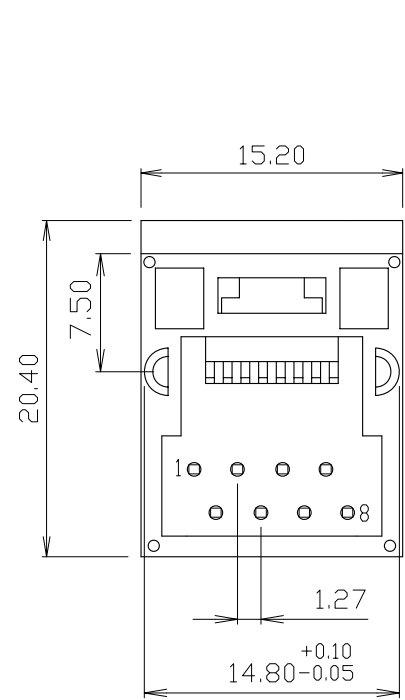

REVISIONS			
LTR	DESCRIPTION	DATE	APP
△	3.25±0.25	12/17/01	CHANG

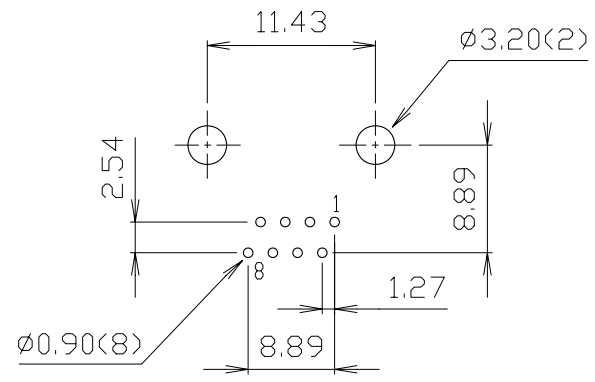

PC Board Layout Ref.

★ 須經壓台 H028A 整針

MJD13C5-KX15-0808-LF
LEADFREE

RoHS Compliant



PART NO. MJD13C5-KX15-0808

DWG NO. MJD13C5-KX15-0808

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

SCALE 1:1

PROJECTION

TOLERANCES ARE
 .X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:
 AREA

RJ45, CAT.5, FLAT CONTACTS,
 TOP ENTRY PCB JACK
 REVISIONS
 HK
 DATE

煜倫股份有限公司