

NOTE:



CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-GRAY.
- 1.2 INSERT HOUSING: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-GRAY.
- 1.3 INSERT COVER: PBT, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-GRAY.
- 1.4 CONTACTS: PHOSPHOR BRONZE.
- 1.5 METAL PEG: BRASS.

2. FINISH:

- 2.1 CONTACTS: 6μ" GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27μm [50μ"] MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 METAL PEG: 2.54μm [100μ"] MIN. TIN PLATED.

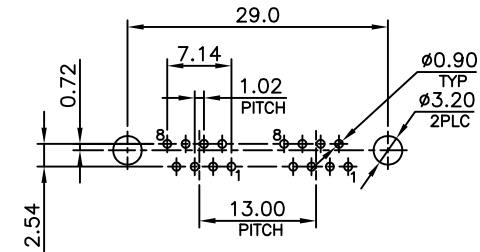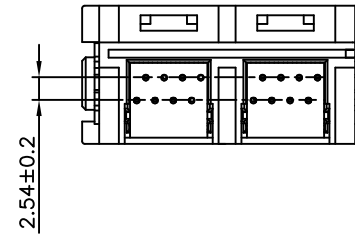

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1:1

.XX ± 0.13

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MJD15A2-GE06ZIM-0808-LF

SERIES

GRAY

06u" GOLD

CLIP

EAR

8P8C

INSERT MOLDING

LEADFREE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: RJ45, TOP ENTRY, PCB GANDED JACK, FROM 2PORTS