

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.





1. MATERIAL:

HOUSING: PBT OR PA46, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
CONTACTS: PHOSPHOR BRONZE.


2. FINISH:

CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μ m [50 μ] MIN. NICKEL UNDERPLATED
ALL OVER.

3. "▽" SHOWS QIP INSPECTION POINT.

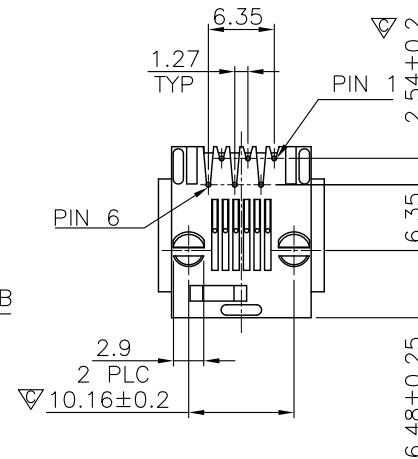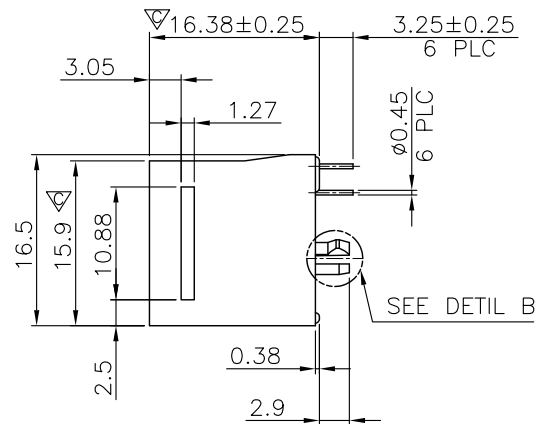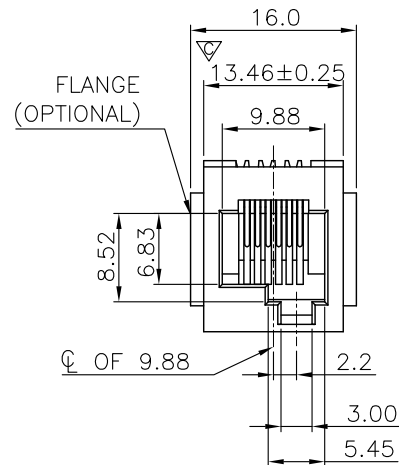

DETAIL B
(SCALE 2:1)

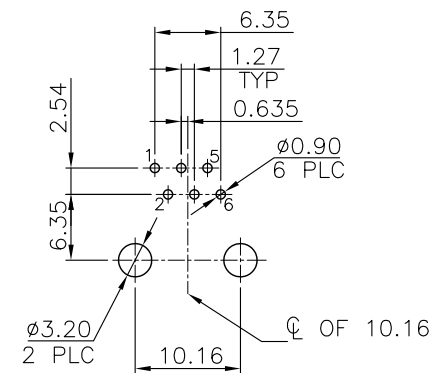

RECOMMENDED PCB LAYOUT

RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.13
.XXX $\pm$ 0.05
ANG $\pm$

照片框

ORDER INFORMATION

MJD16-KE06-0606D-LF

SERIES

6P6C

06u" GOLD

EARS

BLACK

LEADFREE
D TYPE

DESCRIPTION: 6 POSITION, 180°, SPLIT PEGS, OFF-CENTER, TOP ENTRY PCB JACK