

PCB LAYOUT/TOP VIEW

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating



ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO. E166003

MJD16-KX30-1010-LF
 30:30u"/GOLD LEADFREE

RoHS Compliant

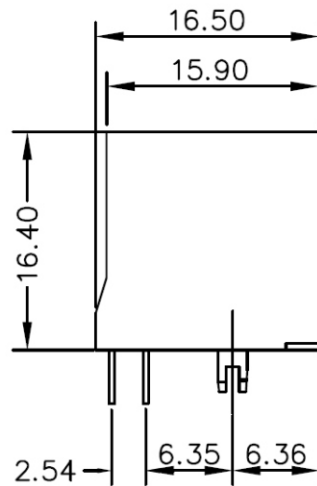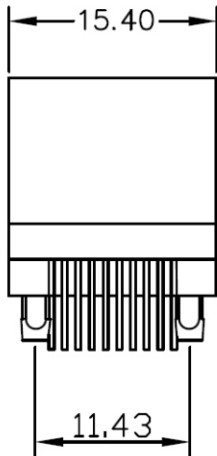

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫股份有限公司

| | | | | | | | |
|---------------------------|-----------|---------------|--|---------------|--|--|--|
| PART NO. MJD 16-KX30-1010 | | CHECKED BY CY | TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG | DESCRIP TION: | | | |
| DWG NO. MJD 16-KX30-1010 | | | | | | | |
| FILE NO. | | DRAWING BY | AREA REVISIONS HK DATE | | | | |
| UNIT / mm | SCALE 1:1 | PROJECTION | | | | | |