

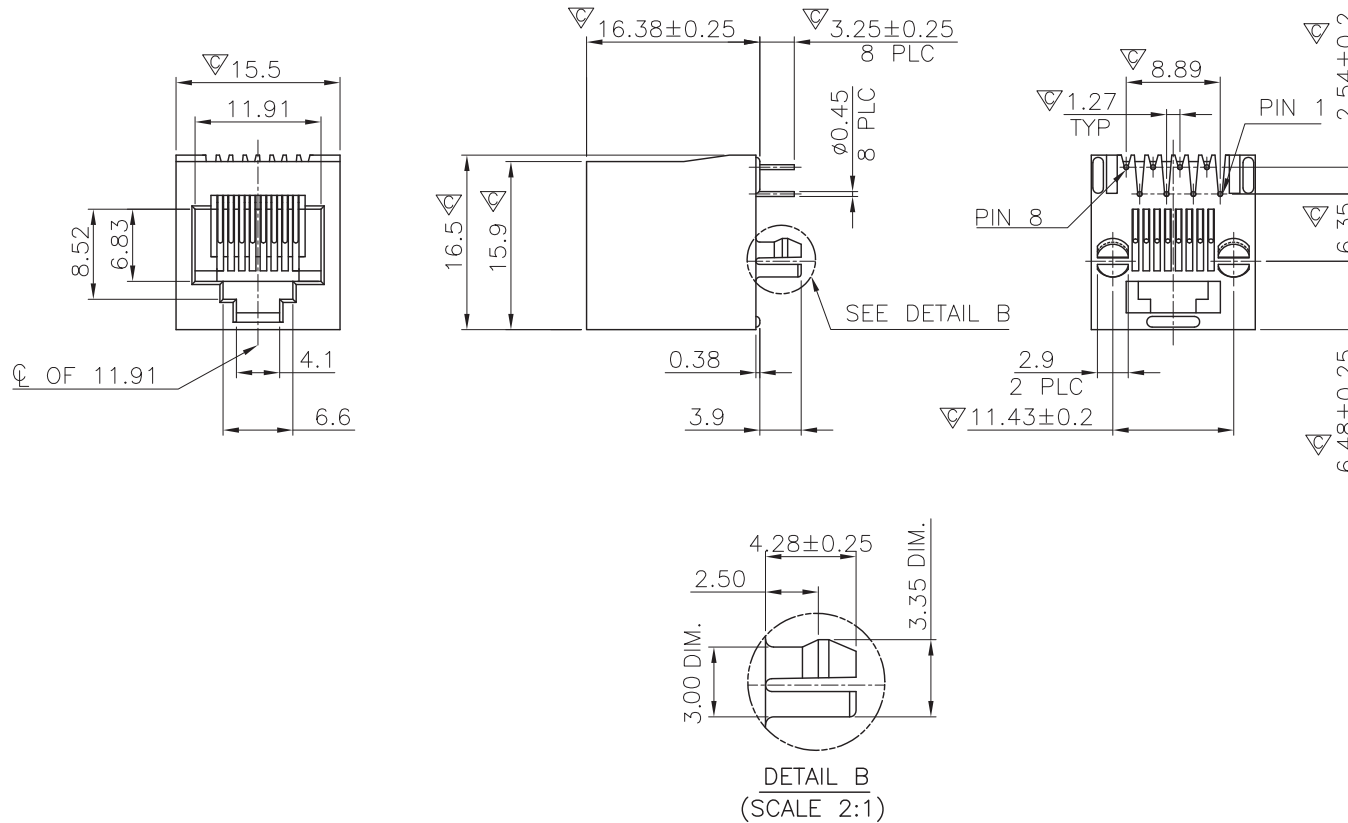


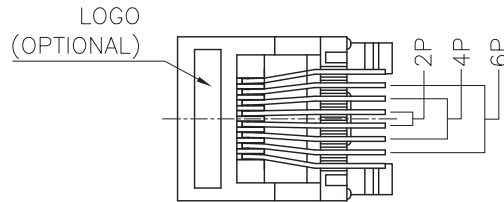

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

- MATERIAL:**
HOUSING: PBT OR PA46, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
CONTACTS: PHOSPHOR BRONZE.
- FINISH:**
CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μm [50 μm] MIN. NICKEL UNDERPLATED
ALL OVER.
- "C" SHOWS QIP INSPECTION POINT.

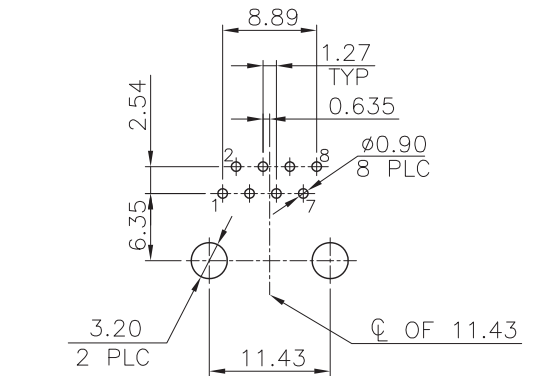

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.13
.XXX $\pm$ 0.05
ANG $\pm$

PPOJECTION



ORDER INFORMATION

MJD16-KXxxP30-0808-LF
SERIES BLACK NON EAR 8P8C LEADFREE
POST 3.00mm
03:GOLD FLASH
06:06u" GOLD
...

DESCRIPTION: 8POSITION, 180°, SPLIT PEGS, TOP ENTRY PCB JACK