

Electrical:

- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:1.5 Amp.
- 3.Contact Resistance:40 Milliohms Max.
- 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
- 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.

Environmental:

- 1.Storage:-40°C To +85°C.
- 2.Opertion:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

MATERIALS:


PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.

MJD16S-KX06-0808-LF
LEADFREE

RoHS Compliant

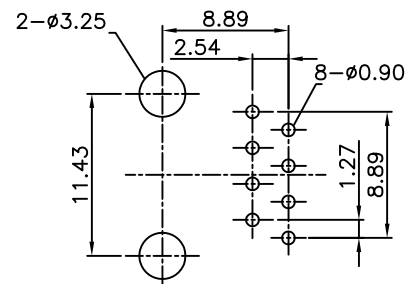

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. MJD16S-KX06-0808

DWG NO. MJD16S-KX06-0808

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- ANG

DESCRIP TION: TOP ENTRY PCB JACK(8P8C)

AREA

REVISIONS

HK

DATE