

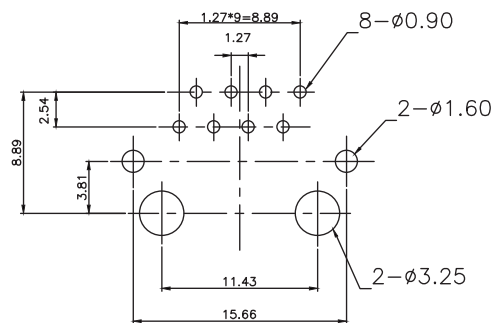
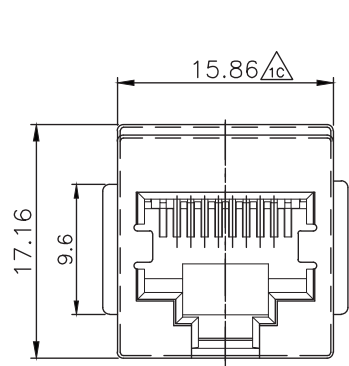




PCB LAYOUT/TOP VIEW

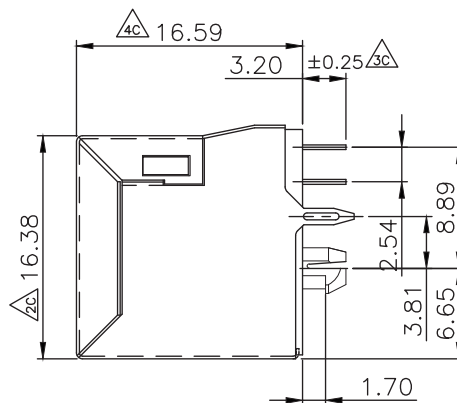

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC

FLAMMABILITY RATING UL 94V-0.

CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELDED: BRASS WITH NICKEL PLATED

Electrical:

1.Voltage Rating:125 Vac Rms.

2.Current Rating:1.5 Amp.

3.Contact Resistance:40 Milliohms Max.

4.Insulation Resistance:1000 Megohms Min @500 Vdc.

5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

1.Operating:750 Cycles Min.

Environmental:

1.Storage:-40°C To +85°C.

2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming
To FCC Part 68, Subpart F.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

.XXX ± 0.10

DATE

ANG ± 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MJDF16-KE01B38-0808-LF

SERIES

8P8C

LEADFREE

REAR TAB 3.81mm

GOLD FLASH

EAR
BLACK

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com