
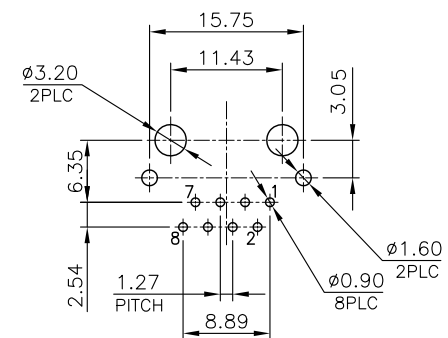
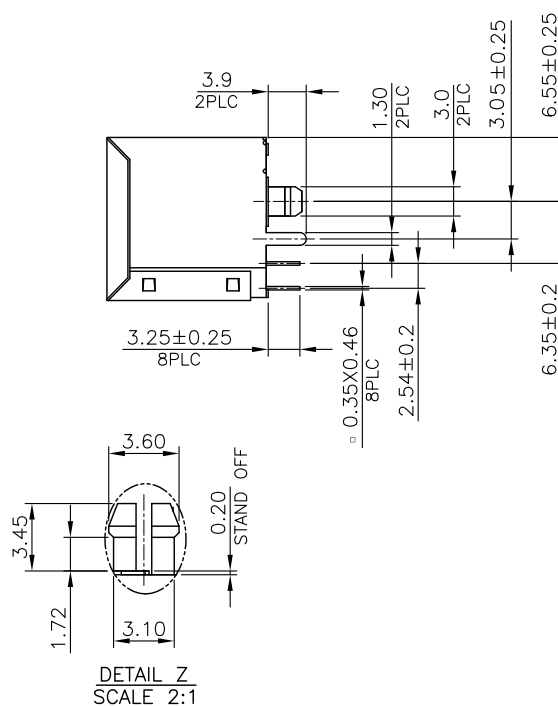

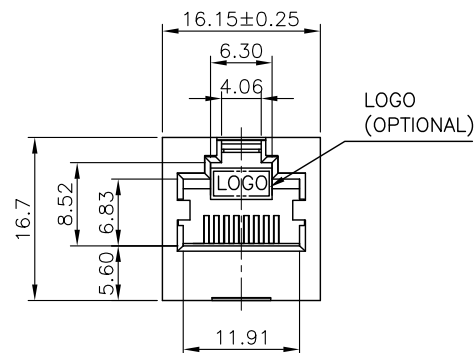



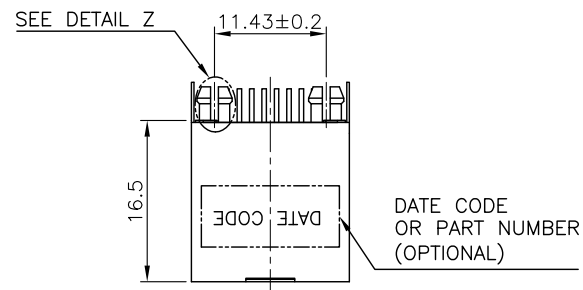

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: $\pm 0.05\text{mm}$ (TOP VIEW)

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PBT OR PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.2 INSERT HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE.
- 1.4 SHELL: BRASS.

2. FINISH:

- 2.1 CONTACTS: GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SHELL: $0.508\mu\text{m}$ [$20\mu''$] MIN. NICKEL PLATED.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG $\pm$

照片框

ORDER INFORMATION

MJDF16-KX06B3-0808-LF

SERIES

8P8C

REAR TAB 3.05mm
06:06u" GOLD

NON EAR
BLACK

LEADFREE

DESCRIPTION: RJ45, WITH SHELL, FLAT PIN, TOP ENTRY PCB JACK