
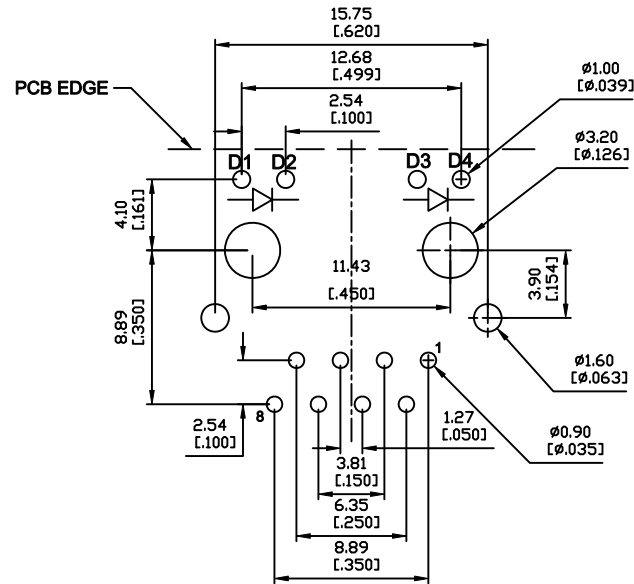
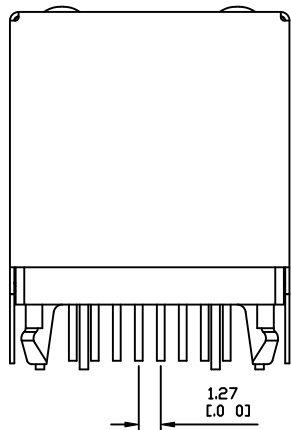
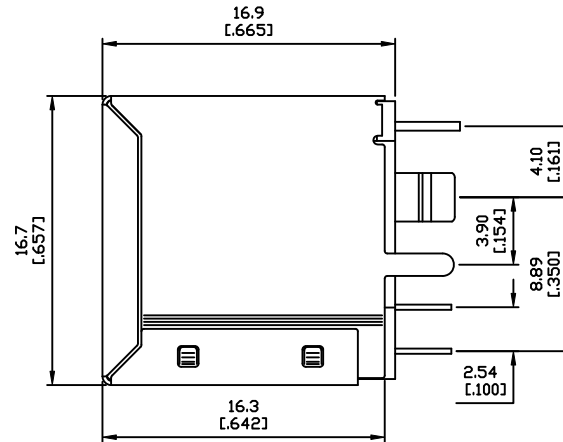


1. MECHANICAL DIMENSIONS:

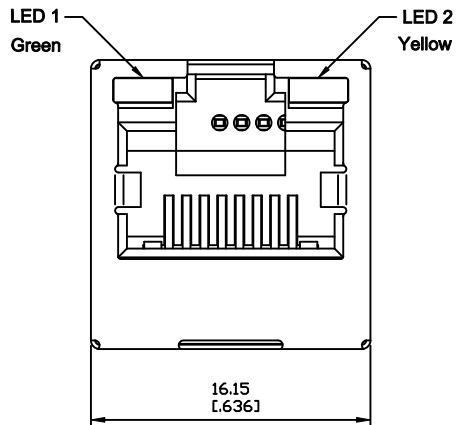

**RECOMMENDED PCB LAYOUT
TOP VIEW**

Material:

- 1.Housing: Thermoplastic UL 94V-0
- 2.Contact : Selective Gold Plating
- 3.Terminal: 0.35mm Thickness Phosphor Bronze Plated With Gold And Tin In Solder Area.
- 4.Shielded: Brass,Nickel Plating
- 5.Operating Temperature Range : 0°C~70°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJDF16T02UL-KX06B39GY-0808

SERIES

8P8C

LED1 / LED2

GREEN / GREEN

REAR TAB 3.90mm

BLACK

06u" GOLD

NON EAR

DESCRIPTION: RJ45 Connector, W/Led, 8P, 8C, Shielded, POE Thru Hole, 10/100 Mbps LAN Magnetics