

NOTES:

MATERIAL:

1. HOUSING MATERIAL: PBT/PA46 UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING: GOLD PLATING $\sim 50\mu$ OVER NICKEL.
4. SHIELD: 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL:



1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC.
5. DIELECTRIC RESISTANCE: 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1. DURABILITY: 750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER: 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. OPERATION: $0^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

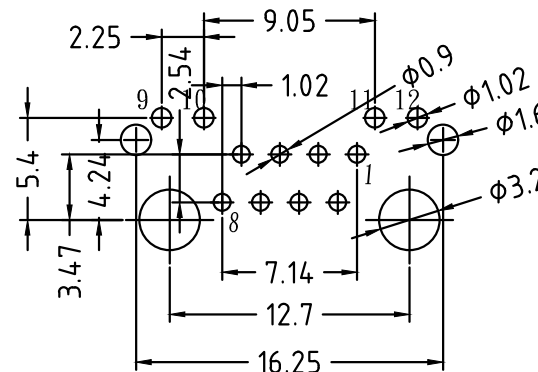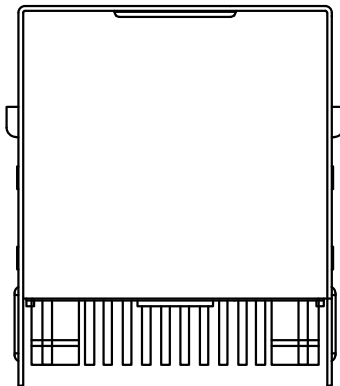

SUGGESTED PCB LAYOUT
(TOP VIEW)

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, \pm
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG \pm

P PROJECTION

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

MJDF16UL-KE06B4OGOG-0808-LF

SERIES LEADFREE
BLACK 8P8C
EAR 06u" GOLD REAR TAB 4.24mm
ORANGE, GREEN / ORANGE, GREEN

DESCRIPTION: