
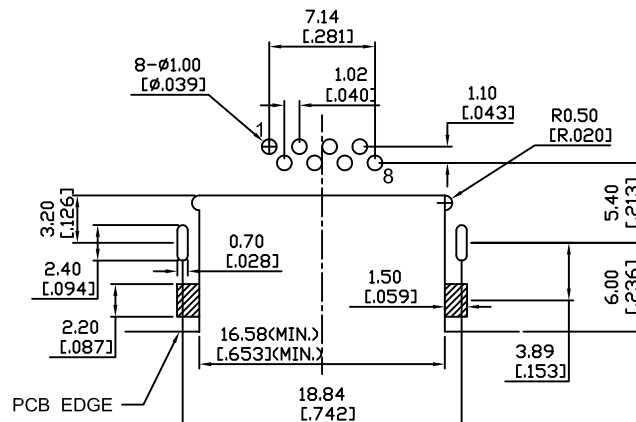


Electrical Characteristics :

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 1000 VAC 1 minute.
- Current Rating : 1.5A

Material:

- Housing: High-Thermoplastic UL94V-0
- Contact : Selective Gold Plating
- Terminal: 0.25mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.
- Shell: Alloy ,Nickel Plating

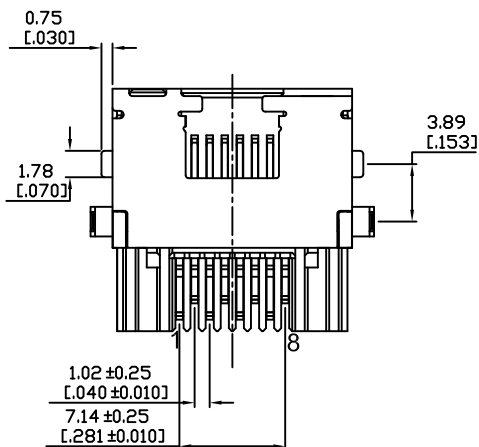

RECOMMENDED PCB LAYOUT
TOP VIEW
PCB THICKNESS: 1.60±0.05mm
TOLERANCE: ±0.05mm



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±

照片框

ORDER INFORMATION

MJF04-KX06EM2-0808-LF
SERIES | | | | LEADFREE
| | | | 8P8C
| | | | METAL FOOT
| | | | EAR
BLACK | | | 06u" GOLD
NON EAR

DESCRIPTION: RJ45,Shielded,Receptacle, Horizontal,Single Port,Tht