


MATERIALS

HOUSING: LCP (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

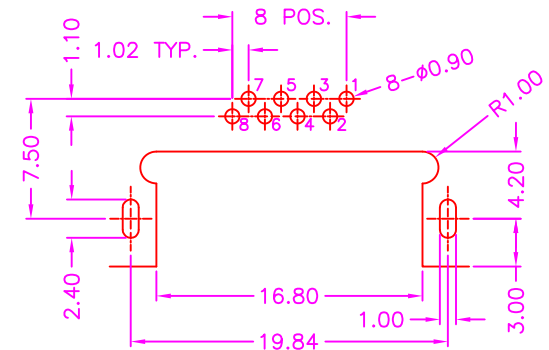

**P.C.B. LAYOUT
 TOP VIEW ±0.05**

NOTE:
 RJ45 CAVITY CONFIRMS TO FCC RULES
 AND REGULATIONS PART 68, SUBPART F.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MJF08U-KX03-0808-LF

SERIES | | | LEADFREE
 | | | 8P8C
 | | | 03u" GOLD
 | | | NON EAR
 | | | BLACK

DESCRIPTION: RJ45, PCB MOUNT, SIDE ENTRY, METAL SHIELD, MID MOUNT