


NOTE:
CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

- MATERIAL:
 - HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - INSERT HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
 - CONTACTS: PHOSPHOR BRONZE.
 - LED SOLDER TAIL: STEEL.
 - SHELL: BRASS.
- FINISH:
 - CONTACTS: GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27µm [50µ"] MIN. NICKEL UNDERPLATED OVERALL.
 - LED SOLDER TAIL: 2.032µm [80µ"] MIN. TIN PLATED.
 - SHELL: 0.508µm [20µ"] MIN. NICKEL PLATED.
- "▽" SHOWS QIP INSPECTION POINT.

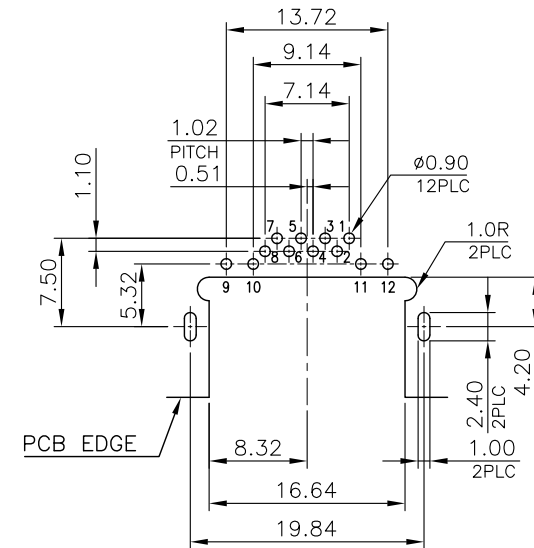

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

.XXX ± 0.10

DATE

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MJF08UL-KT06cc-0808-LF

SERIES

LEADFREE

8P8C

BLACK

GG:GREEN / GREEN

TOP SPRING

GY:GREEN / YELLOW

06u" GOLD

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MODULAR JACK, RJ45, WITH LED'S & SHELL, DIP TYPE