

LED CHARACTERISTIC	
NO.	NODE
LED1	9+  -10
LED2	11+  -12

NOTE:


CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:

- 1.1 HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.2 INSERT HOUSING: PA46, WITH GLASS FIBER, UL94V-0, STANDARD COLOR-BLACK.
- 1.3 CONTACTS: PHOSPHOR BRONZE.
- 1.4 SHELL: BRASS.
- 1.5 LED SOLDER TAIL: STEEL.

2. FINISH:

- 2.1 CONTACTS: GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, 1.27µm [50µ"] MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SHELL: 0.508µm [20µ"] MIN. NICKEL PLATED.
- 2.3 LED SOLDER TAIL: 2.032µm [80µ"] MIN. TIN PLATED.

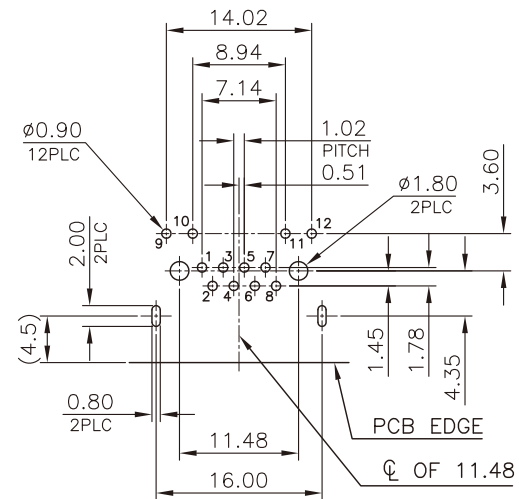

RECOMMENDED PCB LAYOUT  
PCB THICKNESS: 1.6mm  
TOLERANCE: ±0.05mm (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±  
.X ± 0.25  
.XX ± 0.13  
.XXX ± 0.05  
ANG ±

照片框

ORDER INFORMATION

MJF11L-KF50A4xx-0808-LF

SERIES | | | | LEADFREE  
8P8C  
GY:GREEN / YELLOW  
YG:YELLOW / GREEN  
FRONT TAB 4.35mm  
50u" GOLD

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: