


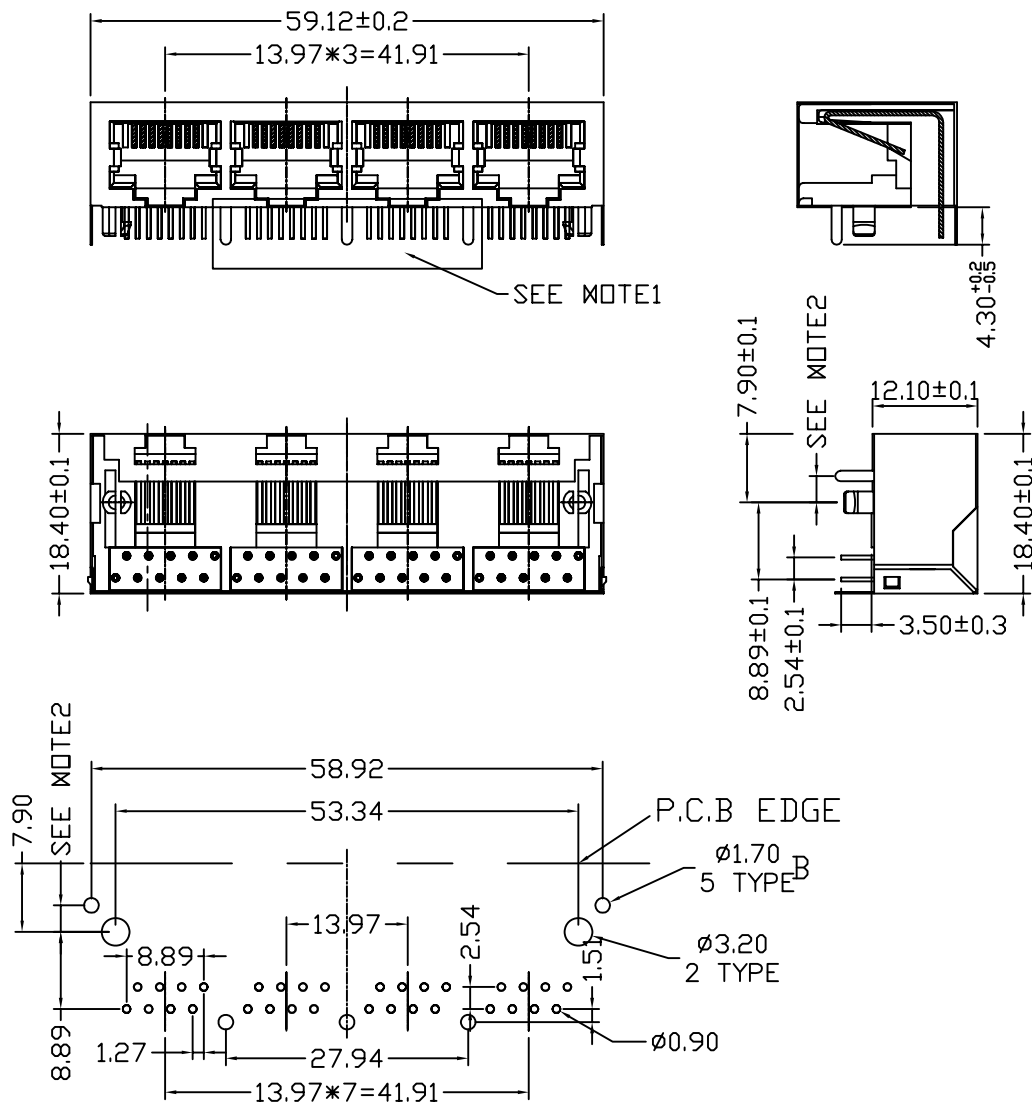

PCB LAYOUT

SPECIFICATION:

Electrical:

Current Rating:1.5Amp max @25℃

Voltage Rating:150VAC max

Insulation Resistance:500 megohms min

Contact Resistance:30 milliohms max

Withstanding Voltage:1000 VAC

Mechanical:

Durability:750 Cycles

Operating Temperature:-40℃~+85℃

Contact Normal Force:100g Minimum

Material:

Housing:High Temperature Thermoplastic

Black UL94V-0


Shield: 0.2mm Thickness Copper

Alloy Tin/Ni Plated

Contact:0.45mm Dia Phosphor Bronze

Plated Gold Over Ni

NOTE2:

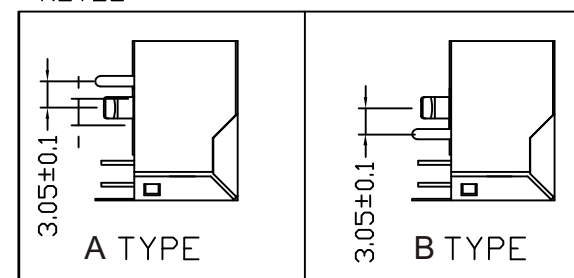

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

照片框

ORDER INFORMATION

MJF12A4-KX06x3-0808-LF

SERIES

BLACK

LEADFREE

8P8C

A3:FRONT TAB 3.05mm

B3:REAR TAB 3.05mm

06u" GOLD

NON EAR

DESCRIPTION: