



MATERIALS:

- HOUSING—PBT POLYESTER UL94V-0 MIXED GLASS FIBER. STANDARD COLOR—BLACK
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY, PLATED WITH NICKEL.
- FILTER—HIGH IMPEDANCE , HIGH RESISTIVITY , FERRITE BLOCK

Impedance Characteristic:

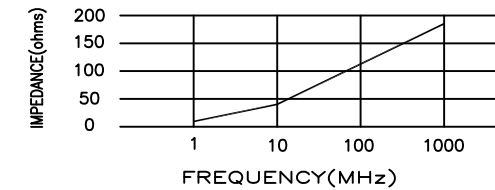

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

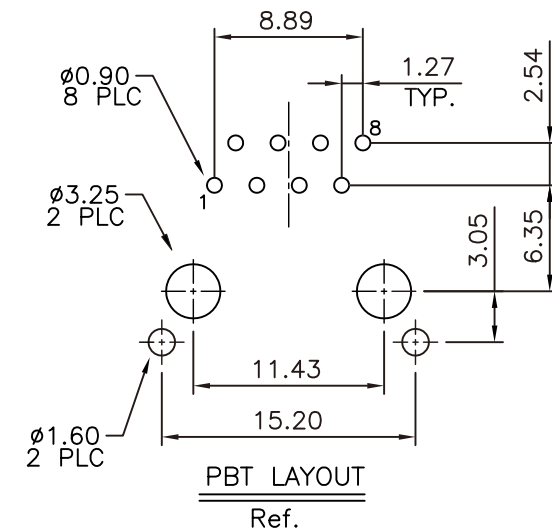

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MJF12F-KX06A3-0808

DWG NO. MJF12F-KX06A3-0808

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

- X ±
- .X ± 0.25
- .XX ± 0.13
- .XXX ± 0.05
- ANG

DESCRIPTION:

8POS SHIELDED
FILTERED & FILTERLESS
SIDE ENTRY PCB JACK

AREA

REVISIONS

DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION