
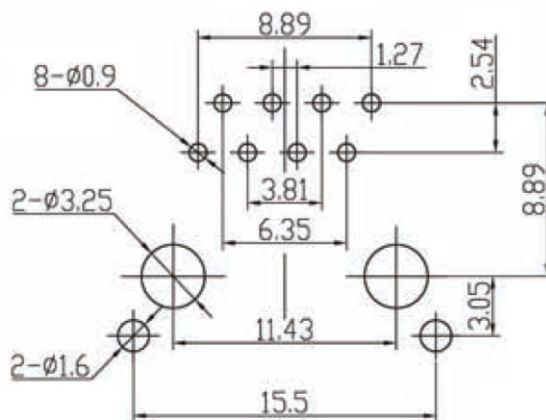
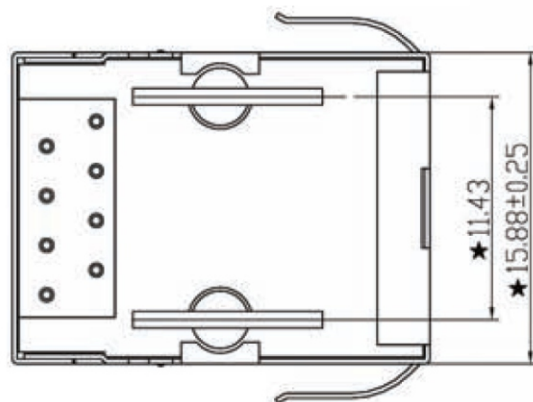
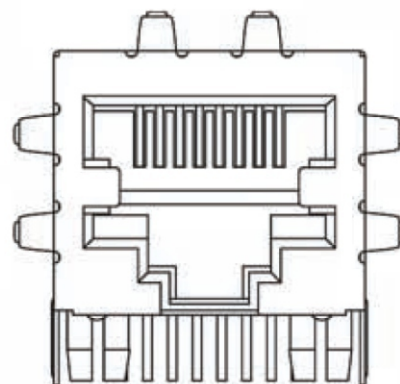


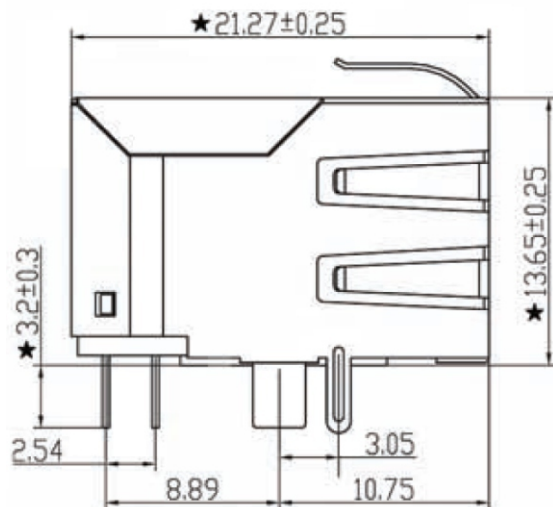

PC Board Layout

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. HOUSING & INSERT MATERIAL : PA46 UL94V-0.
2. CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. SHIELD : 0.20 ~ 0.25MM THICKNESS BRASS WITH TIN PLATED.
4. MATING/UNMATING FORCE : 2.2KG.F MAX.
5. RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
6. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C ~ +85°C RELATIVE HUMIDITY<70%.
2. OPERATION : -40°C ~ +85°C.

Remark:

1. The mark with ★ is the key inspection dimension for QC
2. FOR IEC 60603-7

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MJF13-KF06A3D4-0808-LF

SERIES LEADFREE

8P8C

DIA 0.450

FRONT TAB 3.05mm

06u" GOLD

FULL SPRING

DESCRIPTION: