

SPECIFICATIONS





MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating
4. Shield : 0.25mm Thickness Copper Alloy With Tin/Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 50 milliohms MAX
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

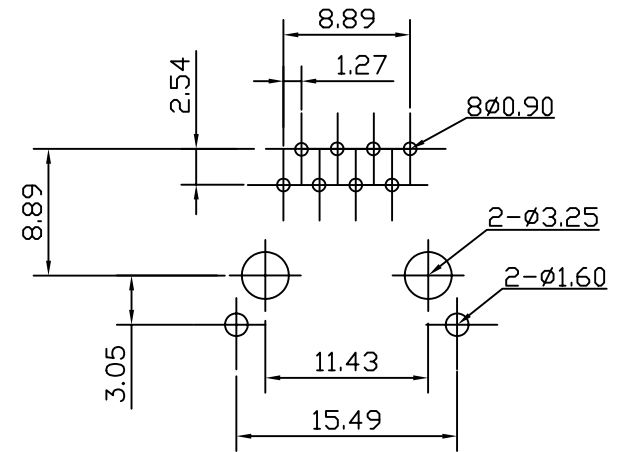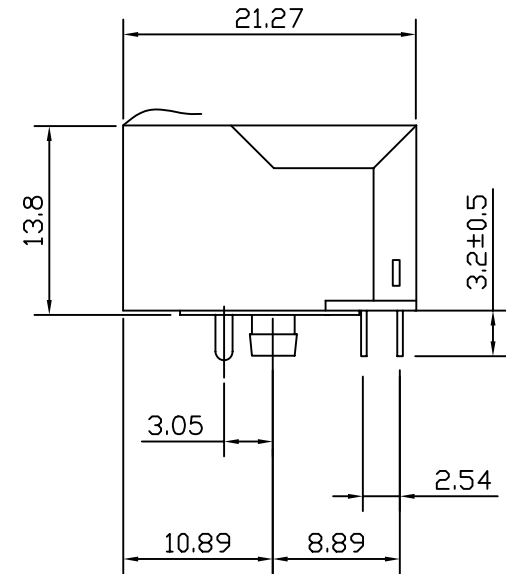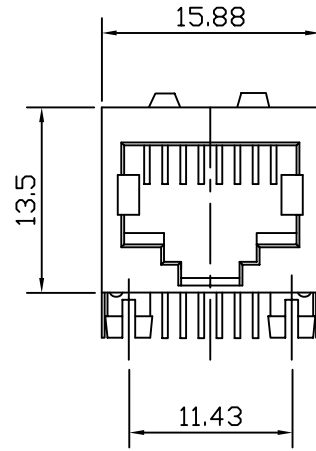

PCB LAYOUT/TOP VIEW



PART NO. MJF13-KT15A3-0808

DWG NO. MJF13-KT15A3-0808

CHECKED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.3

.XX ± 0.2

.XXX ±

AWG

DESCRIPTION:


8P Side Entry Shielded Modular Jack

煜倫有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE