

NOTE:

1.Material:

Housing-high temperature thermoplastic black UL 94V-0
Terminal-phos bronze , plated see how to order
Shield-copper zinc alloy , plated 80~120u' nickel

2. ELECTRICAL CHARACTERISTICS :





1.1 Voltage:150 vac Max.

1.2 Current: 1.5A Max.

1.3 OPERATING TEMPERATURE : -30C ~ 70 °C


3. MECHANICAL CHARACTERISTICS :

MATING FORCE : 3.6Kg MAX. UNMATING FORCE : 2.25Kg MIN.

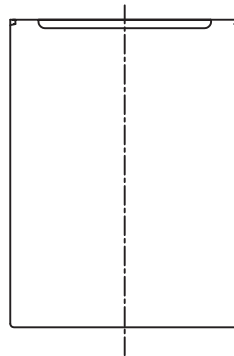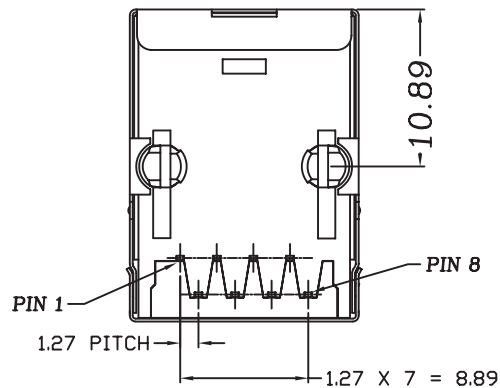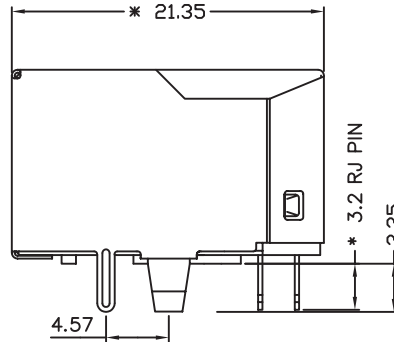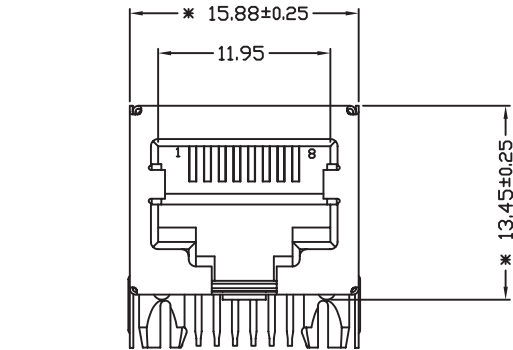

DECTION A

CONNECTOR PROFILE

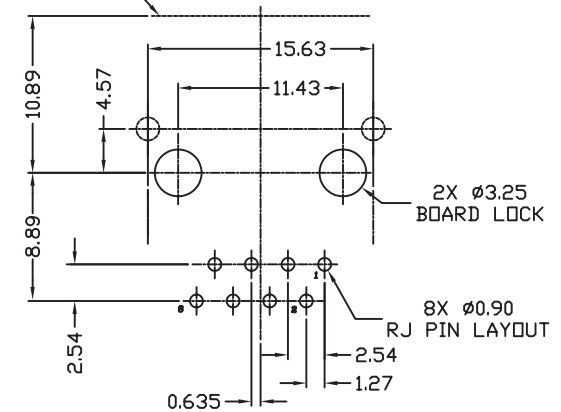

RECOMMENDED PCB LAYOUT

COMPONENT SIDE

ALL DIMENSION TOLERANCE ARE ±0.05mm
UNLESS OTHERWISE SPECIFIED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJF13-KXxxA4-0808-LF

SERIES

LEADFREE

8P8C

FRONT TAB 4.57mm

BLACK

06:06u" GOLD

NON EAR

15:15u" GOLD

DESCRIPTION: RJ45 (Without spring) 8p8c