

**SPECIFICATIONS**

**MATERIAL:**

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.25mm Thickness Copper Alloy With Nickel Plated

**ELECTRICAL:**


1. Current Rating : 1.5 AMP
2. Voltage Rating : 150 VAC
3. Contact Resistance : 20 Milliohms MAX
4. Insulation Resistance : 500 Milliohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

**MJF13A6-KX03A4-0808-LF**

**LEADFREE**

**RoHS Compliant**

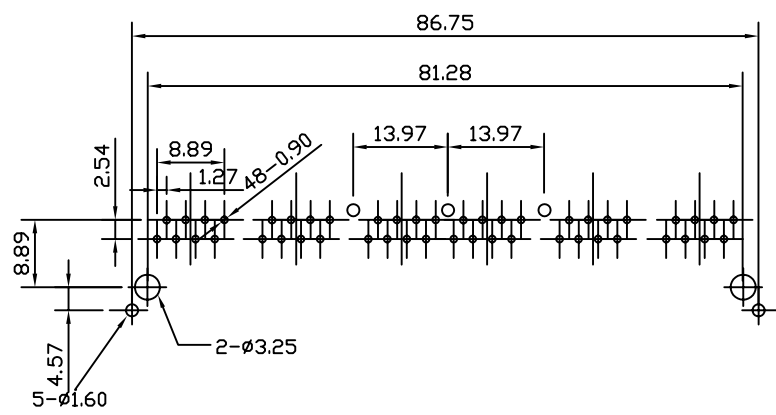

PCB LAYOUT/TOP VIEW



PART NO. MJF13A6-KX03A4-0808		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 10P Side Entry Shielded Gang Jack(6 Port)		
DWG NO. MJF13A6-KX03A4-0808				DRAWING BY	AREA	REVISIONS
FILE NO.		PROJECTION				
UNIT / mm	SCALE 1:1					

煜倫股份有限公司