

SPECIFICATIONS




MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.25mm Thickness Copper Alloy With Tin/Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 50 Milliohms MAX
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL, CUL NO.: E166003

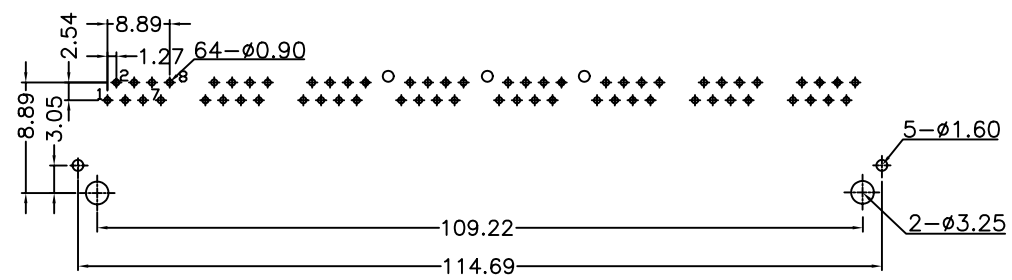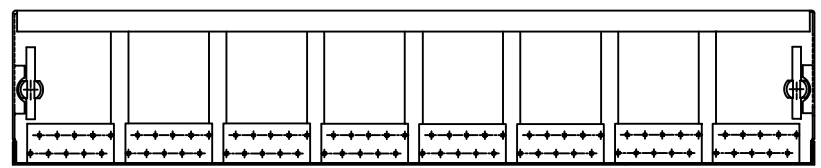

PCB LAYOUT/TOP VIEW



煜倫有限公司

PART NO. MJF13A8-KF03B3-0808		CHECKED BY CY	TOLERANCES ARE .X ± 0.3 .XX ± 0.2 .XXX ± AWG	DESCRIP TION: 10P Side Entry Shielded Gang Jack(8 Port)			
DWG NO. MJF13A8-KF03B3-0808							
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1						