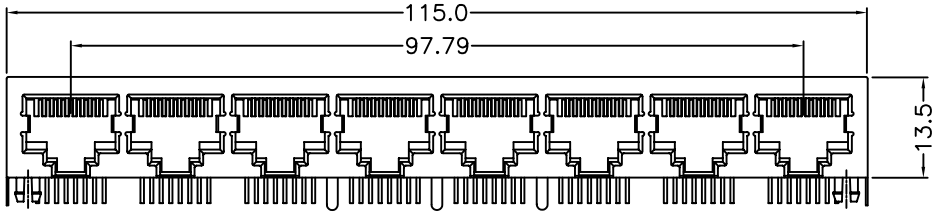


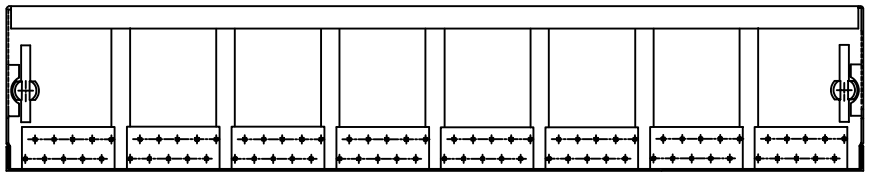




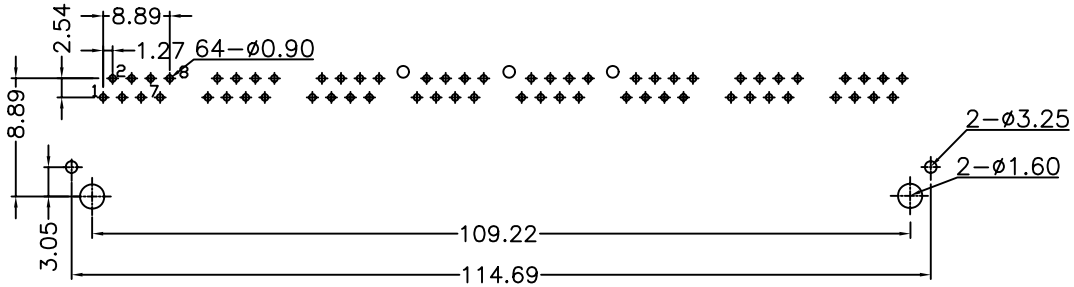


PCB LAYOUT/TOP VIEW

## *SPECIFICATIONS*

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold
4. Shield : 0.25mm Thickness Copper Alloy With Tin/Nickel Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Voltage Rating : 150 VAC
3. Contact Resistance : 20 Milliohms MAX
4. Insulation Resistance : 500 Milliohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

MORETHANALL CONNECTORS ASSEMBLIES

煜倫有限公司

| | | | | | | |
|---|---|---|---|---|---|---|
| PART NO. MJF13A8-KX03B3-0808 | | | | | | |
| DWG NO. MJF13A8-KX03B3-0808 | CHECKED BY CY | TOLERANCES ARE .X ± 0.3 .XX ± 0.2 .XXX ± AWG | DESCRIP TION: | 10P Side Entry Shielded Gang Jack(8 Port) | | |
| FILE NO. | DRAWING BY | | AREA | REVISIONS | HK | DATE |
| UNIT / mm SCALE 1 : 1 | PROJECTION | | | | | |