


MATERIAL: •HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER.
 STANDARD COLOR-BLACK
 •CONTACTS-0.35mm THICK. PHOS-BRONZE
 PLATED WITH HARD GOLD AND
 TIN/LEAD IN SOLDER AREA
 •SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
 PLATING:50u" MINIMUM HARD GOLD OVER
 2.54UM (100u")NICKEL OVER TIN
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

CATEGORY-5 SINGLE PORT 8POS.
 SIDE ENTRY SHIELDED PCB JACK

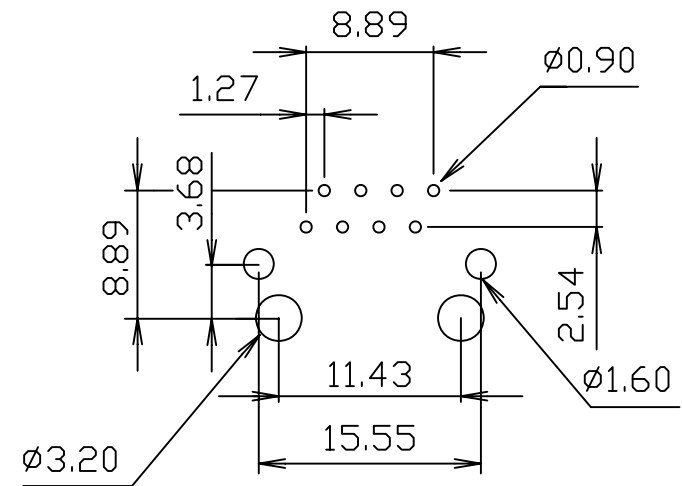

PC Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MJF13C5-KX50B36-0808-LF

SERIES 8P8C LEADFREE
 REAR TAB 3.68mm
 50u" GOLD
 NON EAR
 BLACK

DESCRIPTION: 8POSITION SHIELDED SIDE ENTRY PCB JACK