
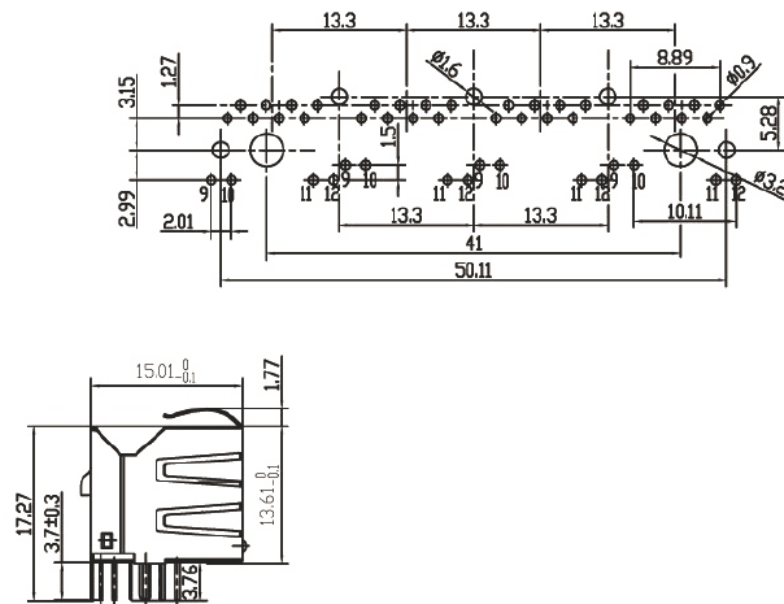


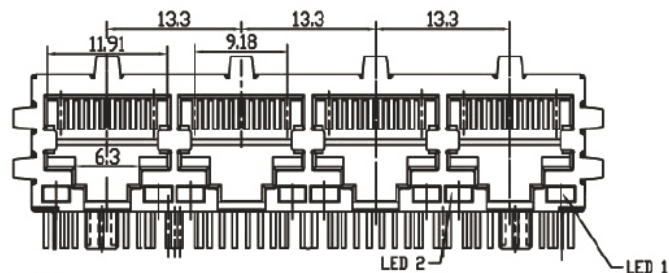

1. STORAGE: -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 230~250°C (5~10 SECONDS)
MATES WITH MODULAR PLUG CONFORMING
TO FCC PART 68, SUBPART E.

DESCRIPTION: