


**SPECIFICATIONS**

**MATERIAL:**


1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating
4. Shield : 0.20mm Thickness Copper Alloy With Nickel Plated

**ELECTRICAL:**

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

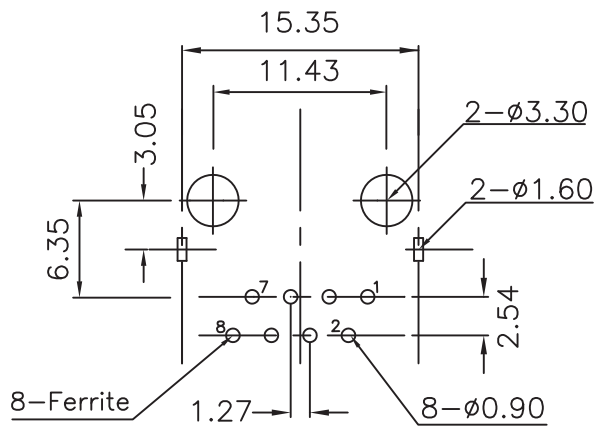

PCB LAYOUT/TOP VIEW



MJF13SF-KX06B3-0808-LF

LEADFREE

RoHS Compliant



PART NO. MJF13SF-KX06B3-0808

DWG NO. MJF13SF-KX06B3-0808

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

10P Side Entry Shielded Modular Jack W/Ferrite

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE