
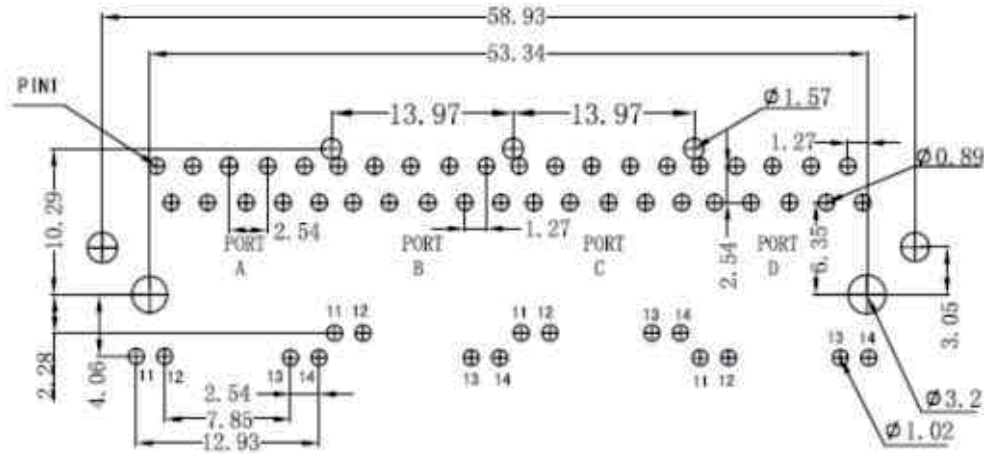


**EXTERNAL DIMENSIONS :**

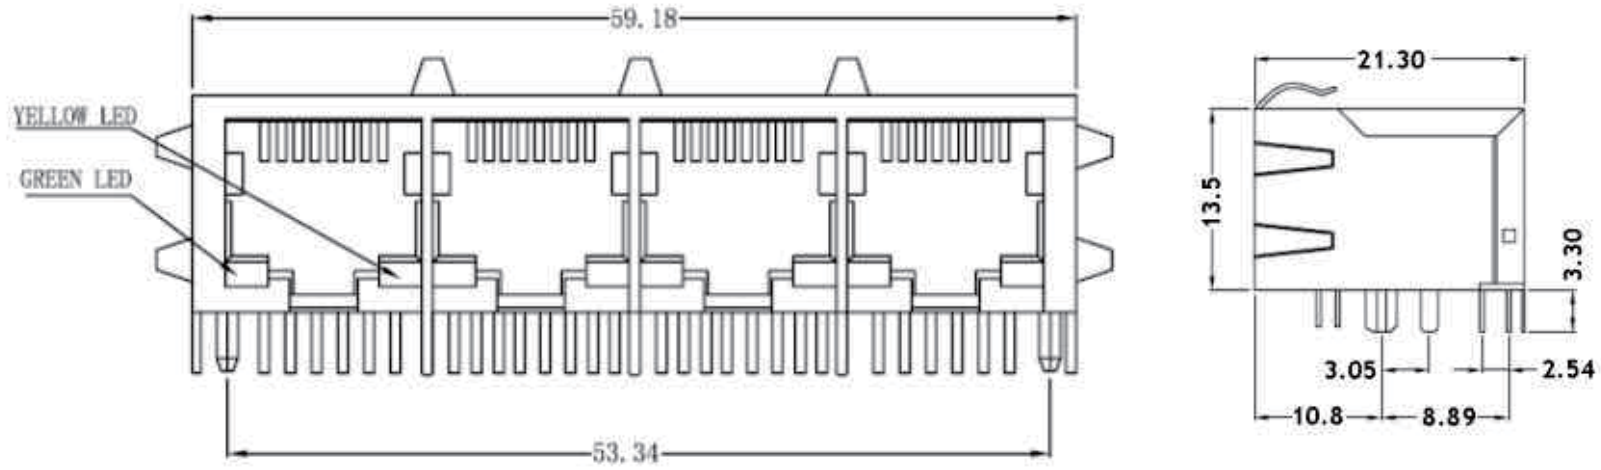

**Suggested PCB Layout (TOP VIEW)**

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

X, ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

SIZE A4

PJECTION

照片框

**ORDER INFORMATION**

**MJF13T010LA4-KF06B3GY-0808-LF**

SERIES

LEADFREE

8P8C

GREEN / YELLOW

REAR TAB 3.05mm

BLACK

06u" GOLD


FULL SPRING

DESCRIPTION:

**ELECTRICAL CHARACTERISTIC @25°C :**

1. Turns Ratio ( $\pm 2\%$ ):  
TX=1CT:1CT      RX=1CT:1CT
2. Inductance:  
350uH MIN@100KHz, 0.1V, 8mA DC BIAS.
3. Cross Talk (Min):  
1-30MHZ: -40 dB  
30-60MHZ: -35 dB  
60-100MHZ: -30 dB
4. Return Loss (Min):  
1-10MHz: -20dB  
10-30MHz: -16 dB  
30-60MHz: -12 dB  
60-100MHz: -10 dB
5. CMR (Min):  
1-50MHz: -30dB  
50-150MHz: -20 dB
6. Insertion Loss (Max):  
1.0-65MHz: -1.0 dB
7. Hi-Pot Test: 1500Vrms Min.
8. Operating Temperature: 0°C~70°C

**SCHEMATIC DRAWING :**

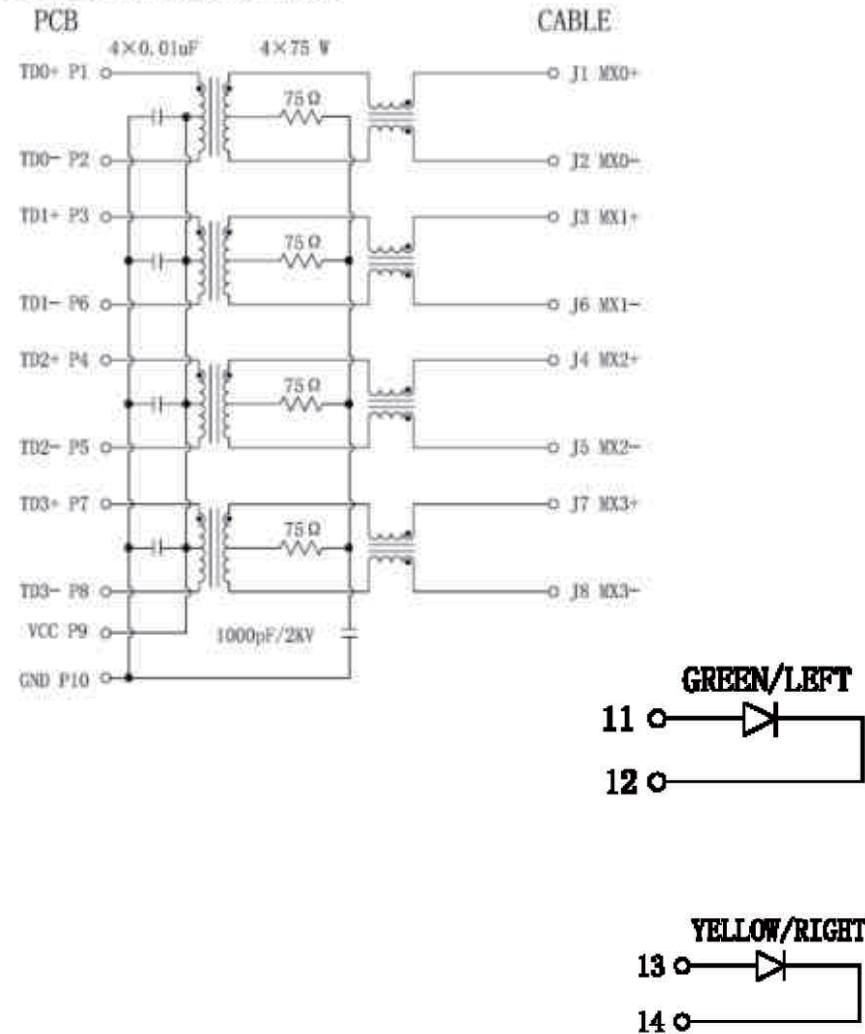

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm    SCALE 1 : 1  
DATE  
SIZE A4

TOLERANCES ARE  
X,  $\pm$   
.X,  $\pm$   
.XX,  $\pm$   
.XXX,  $\pm$   
ANG,  $\pm$

P PROJECTION

照片框

**ORDER INFORMATION**

MJF13T010LA4-KF06B3GY-0808-LF

SERIES

LEADFREE

8P8C

GREEN / YELLOW

REAR TAB 3.05mm

BLACK

06u" GOLD

FULL SPRING

DESCRIPTION: