

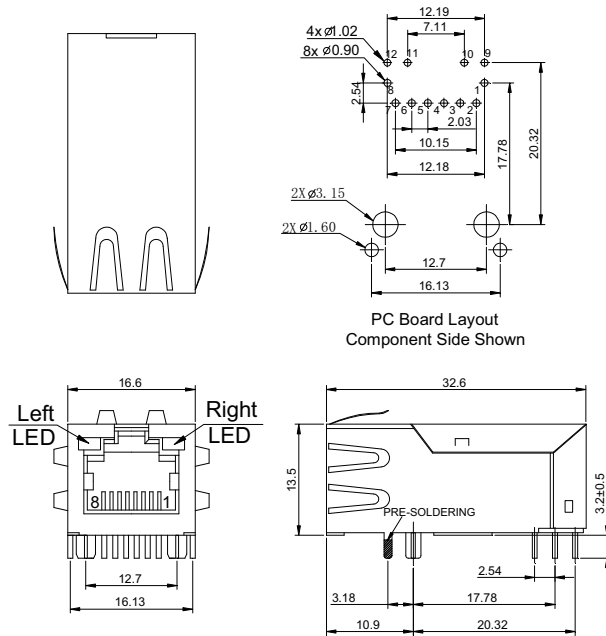


一、Mechanical Dimensions



UNIT:mm Unless otherwise specified, all tolerances are ± 0.25

二、Schematics

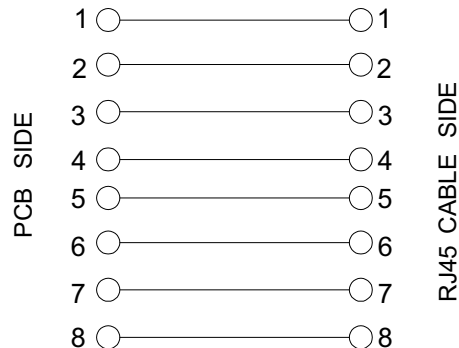

Standard LED	Wavelength	Forward*V(MAX)	TYP
Green	565nm	2.5v	2.2v
Yellow	585nm	2.5v	2.1v
Orange	610nm	2.5v	2.1v

With a forward current of 20mA

三、ELECTRICAL SPECIFICATIONS@25 °C:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS.
2. CURRENT RATING:1.5 AMP.
3. CONTACT RESISTANCE:45 MILLIOHMS MAX.
4. INSULATION RESISTANCE:1000 MEGOHMS MIN@500 VDC.
5. DIELECTRIC STRENGTH:500 VAC RMS 60Hz,1MIN.

MECHANICAL:

1. HOUSING MATERIAL: NYLON 66 UL94V-0
2. CONTACT MATERIAL: Qsn6.5-0.1---0.35mm.
3. PLATING:GOLD PLATING OVER NICKEL.
4. OPERATING LIFE:750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER:1 LB MIN.
6. PCB RETENTION POST-SOLDER:10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE:-40°C TO +85°C.
2. OPERATION:-40°C TO +85°C.

RoHS compliance:YES

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MJF13T11UL-KF06A31GOYX-0808

SERIES

BLACK

06u" GOLD

FRONT TAB 3.18mm

FULL SPRING

8P8C

LED LEFT

GREEN/ORANGE

LED RIGHT

YELLOW /

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 10/100 Base-T Single Port Rj45 Integrated Connector Modul

四、Mechanicals

Housing Material:

MATERIAL: NYLON 66 UL94V-0 STANDARD COLOR:BLACK

Insert Material:

MATERIAL: Qsn6.5-0.1---0.35mm Thickness

Insert -PBT GF UL94V-0

- 1.PLATING(1) NICKEL, (50u " typ)
- 2.PLATING(2) 100%Sn
- 3.PLATING(3) GOLD (6u ")

plug into Housing Material:

PBT+30%GF UL 94V-0

Contact pin Material:

MATERIAL: Qsn6.5-0.1---0.35mm Thickness

- 1.PLATING(1) NICKEL, (50u " typ)
- 2.PLATING(2) 100%Sn, (100u min)


Shielding Material:

BRASS H65Y PLATING NICKEL

Operating Life:750 Cycles MIN.


五、Environmental

- 1.Storage Temp:-40℃TO +85℃.
- 2.Operating Temp:-40℃TO +85℃
3. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

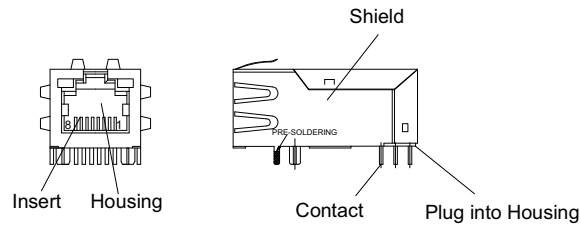


六、Packaging

1. packaging unit : 60 PCS/tray
2. packaging material : PET

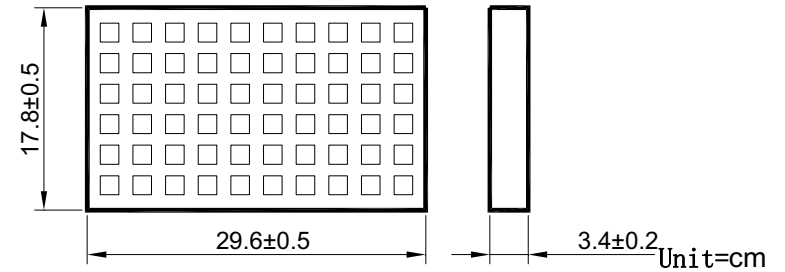

3. outer carton unit 840 pcs/ 14 Trays/box

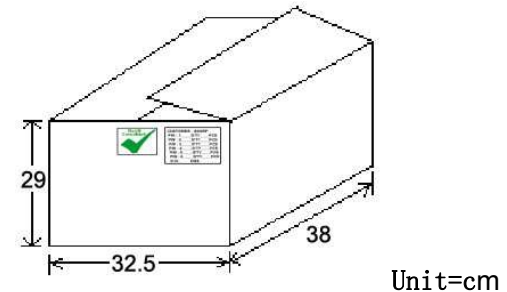

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

MJF13T11UL-KF06A31GOYX-0808

SERIES

BLACK

06u" GOLD
FULL SPRING

8P8C
LED LEFT
GREEN/ORANGE
FRONT TAB 3.18mm

LED RIGHT
YELLOW /

DESCRIPTION: 10/100 Base-T Single Port Rj45 Integrated Connector Modul