

Mechanicals

Housing Material:

MATERIAL:NYLON GF (Fr50) UL94V-0 STANDARD COLOR:BLACK

Insert Material:

MATERIAL:Phos-Bronze C5210 EH---0.35mm Thickness

Insert -PBT GF UL94V-0

- 1.PLATING(1) NICKEL 50u " ~80u "
- 2.PLATING(2) 100%Sn 100u " ~150u "
- 3.PLATING(3) GOLD (3u " ~50u ")

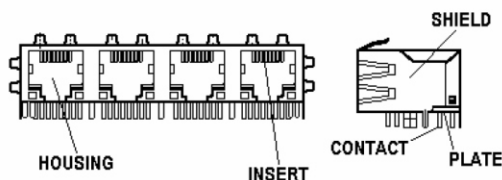


Plate Material:

PBT GF UL 94V-0

Contact pin Material:

MATERIAL: Phos-Bronze C5210 EH---0.35mm Thickness

- 1.PLATING(1) NICKEL 30u " ~70u "
- 2.PLATING(2) 100%Sn 100u " ~150u "

Shielding Material:

BRASS C2680 H.---0.25mm THICKNESS PLATING NICKEL 30U " - 50U "


Operating Life:750 Cycles MIN.

Environmental

- 1.Storage Temp:-40°C TO +85°C.
- 2.Operating Temp: 0°C TO +70°C.
- 3.Wave Soldering Temperature:230~250°C (3~5 SECONDS)
- 4. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.


Packaging

- 1. packaging unit : 20 PCS/tray
- 2. packaging material : PVC

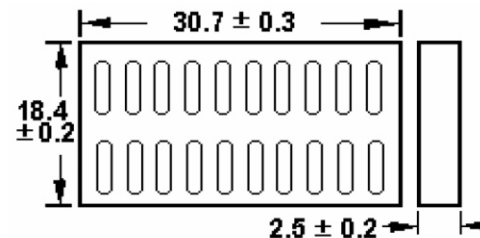

Unit=cm

- 3. outer carton unit: 400 pcs/ 20 Trays/box



Unit=cm



PART NO.MJF13T2LA4-KF06B3YG-0808

DWG NO. MJF13T2LA4-KF06B3YG-0808

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

煜倫股份有限公司

FILE NO.


DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE