


SUGGESTED PCB LAYOUT (TOP VIEW)

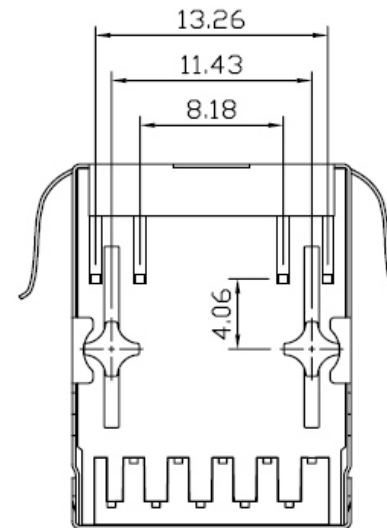

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MJF13T506L-KF06B3GY-0808

RoHS Compliant

DWG NO. MJF13T506L-KF06B3GY-0808

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ± 0.2

.XX ±

.XXX ±

AWG

AREA

REVISIONS

HK


DATE

焯倫股份有限公司

UNIT / mm

SCALE 1:1


PROJECTION



ELECTRICAL CHARACTERISTIC @25°C :

1. Turn Ration($\pm 2\%$):TX = 1CT : 1CT
RX = 1CT : 1CT
2. Inductance OCL : 350uH Min.@ 100KHz / 0.1V, 8mA DC Bias
3. Insertion Loss-1.0dB Max. @1 - 65MHz
4. Return Loss : -20dB Min. @ 1 - 10MHz
-16dB Min. @ 10 - 30MHz
-12dB Min. @ 30 - 60MHz
-10dB Min. @ 60 - 100MHz
5. Cross talk : -40dB Min. @ 1 - 30MHz
-35dB Min. @ 30 - 60MHz
-30dB Min. @ 60 - 100MHz
6. Common Mode Rejection -30dB Min. @ 1 - 50MHz
-20dB Min. @ 50 - 150MHz
7. Hipot Test : 1500Vrms Min.
8. Operating Temperature : 0°C ~ 70°C

SCHEMATIC DRAWING :

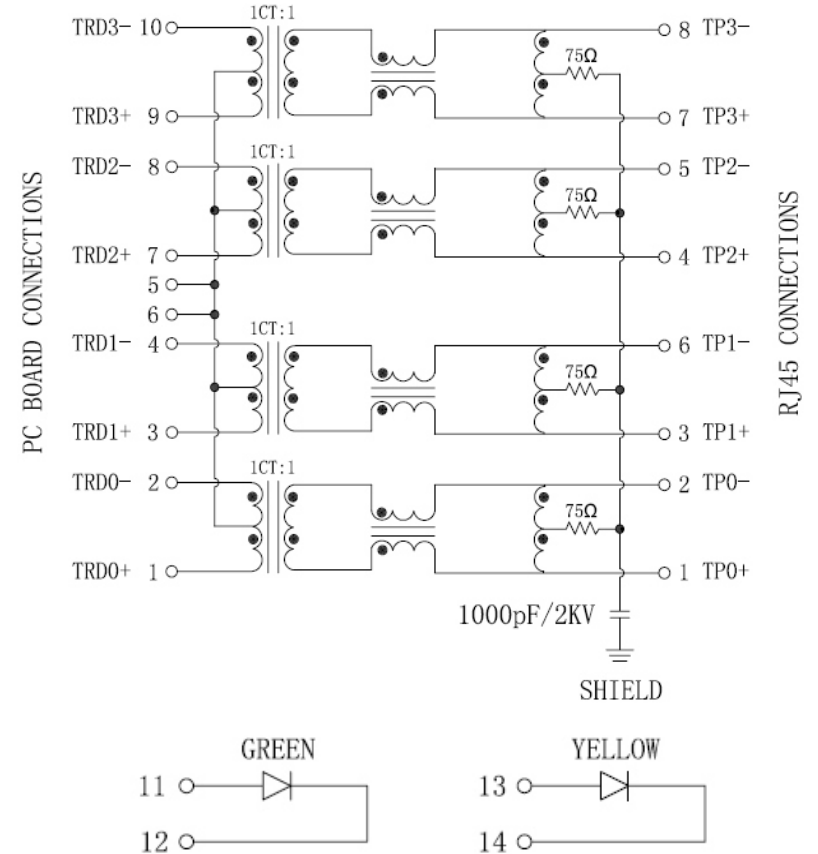

MORETHANALL
CONNECTORS
ASSEMBLIES

焯倫股份有限公司

PART NO. MJF13T506L-KF06B3GY-0808		CHECKED BY CY	TOLERANCES ARE .X \pm 0.2 .XX \pm .XXX \pm AWG	DESCRIP TION:			
DWG NO. MJF13T506L-KF06B3GY-0808							
FILE NO.		DRAWING BY	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1	PROJECTION					