


MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V—0
- CONTACTS—0.35mm THICK PHOS—BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

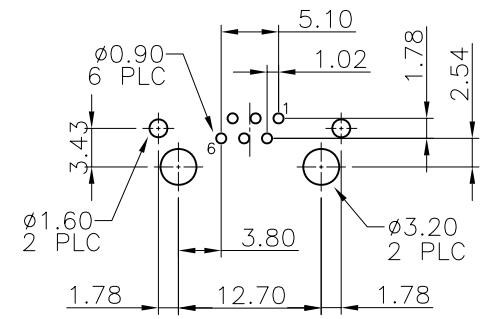

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PJECTION

照片框

ORDER INFORMATION

MJF13U-KF06B3-0606

SERIES 6P6C
REAR TAB 3.43mm
06u" GOLD
FULL SPRING
BLACK

DESCRIPTION: MODULAR JACK, RJ45, DIP TYPE, SIDE ENTRY PCB JACK

煜倫股份有限公司

www.morethanall.com