


**MATERIAL:**

- HOUSING—DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED  
WITH 6u" HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

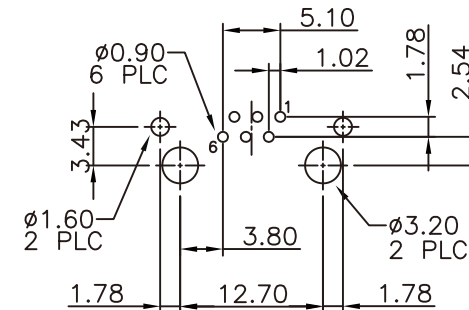

RECOMMENDED PCB LAYOUT (THICKNESS: 1.6mm)  
DIMENSION TOLERANCE: 1 PLC: ±0.1 2PLC: ±0.05)  
TOP VIEW

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±  
.X ± 0.25  
.XX ± 0.13  
.XXX ± 0.05  
ANG ±

照片框

**ORDER INFORMATION**

**MJF13U-KF06B3IM-0606-LF**

SERIES | | | | LEADFREE  
6P6C  
INSERT MOLDING  
REAR TAB 3.05mm  
BLACK | | | | 06u" GOLD  
FULL SPRING

DESCRIPTION: MODULAR JACK, RJ45, DIP TYPE, SIDE ENTRY PCB JACK

煜倫股份有限公司

www.morethanall.com