


DETAIL X

MATERIALS:
 · HOUSING-DSM STANYL TE250F6 (NYLON-46)
 HEAT DEFLECTION TEMP.290°
 BLACK OD&DR,UL94V-0
 · CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
 WITH HARD GOLD AND GOLD FLASH IN
 SOLDER AREA.
 · SHIELD-0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

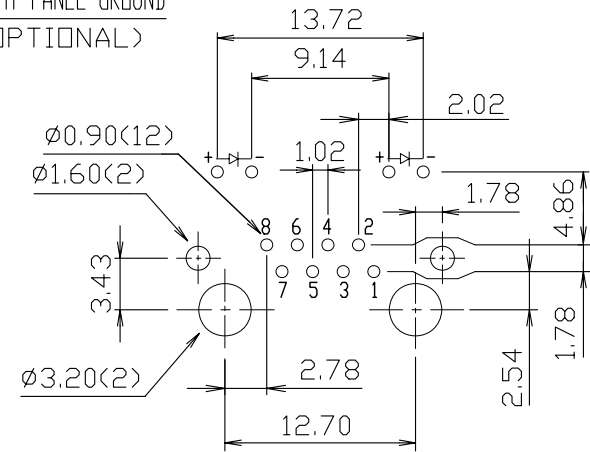

PCB LAYOUT Ref.

RoHS Compliance



PART NO. MJF13UL-KF06B3YGYG-0808

DWG NO. MJF13UL-KF06B3YGYG-0808

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIPTION:


RJ45, WITH LED'S, SHIELDED
 FLAT PIN, SIDE ENTRY JACK

焯倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE