


DETAIL X

#### MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V—0
- CONTACTS—0.35mm THICK PHOS—BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH IN  
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

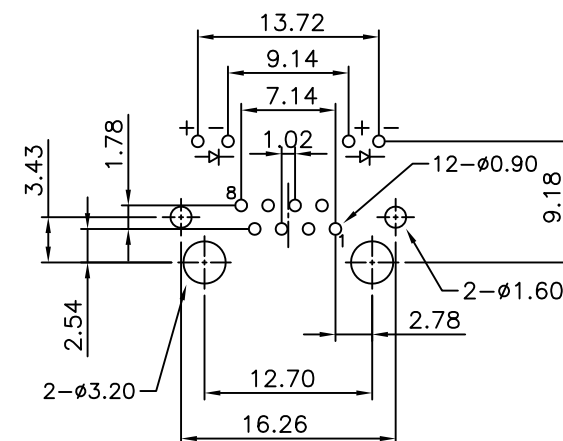

PCB LAYOUT (TOP VIEW)  
RECOMMENDED

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±  
.X±  
.XX±  
.XXX±  
ANG ±

PPOJECTION



#### ORDER INFORMATION

MJF13UL-KF06B3xx-0808

SERIES BLACK FULL SPRING LED1 / LED2 8P8C  
GG:GREEN / GREEN  
YG:YELLOW / GREEN  
REAR TAB 3.43mm  
06u" GOLD

DESCRIPTION: RJ45, W/O LED FLAT PIN, SIDE ENTRY JACK