


DETAIL X

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

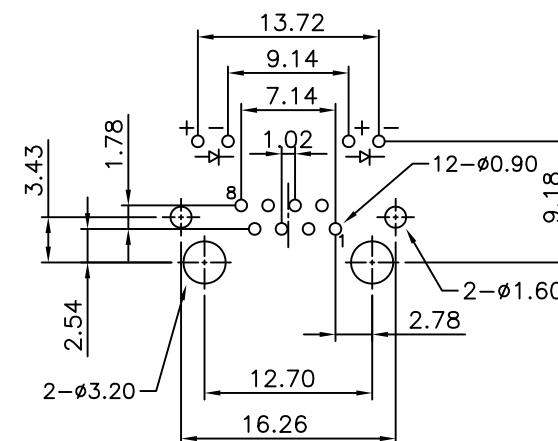

PCB LAYOUT (TOP VIEW)
RECOMMENDED

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PJECTION



ORDER INFORMATION

MJF13UL-KF06B3xx-0808

SERIES BLACK FULL SPRING LED1 / LED2 8P8C
GG:GREEN / GREEN
YG:YELLOW / GREEN
REAR TAB 3.43mm
06u" GOLD

DESCRIPTION: RJ45, W/O LED FLAT PIN, SIDE ENTRY JACK