
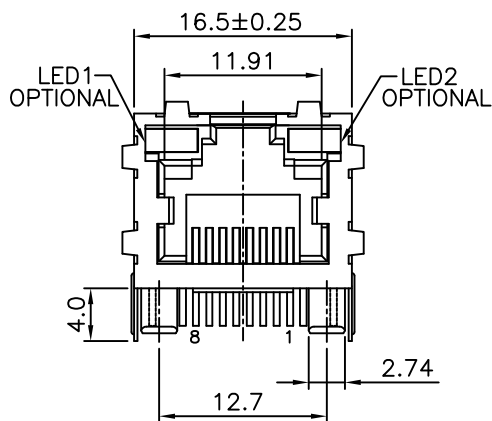
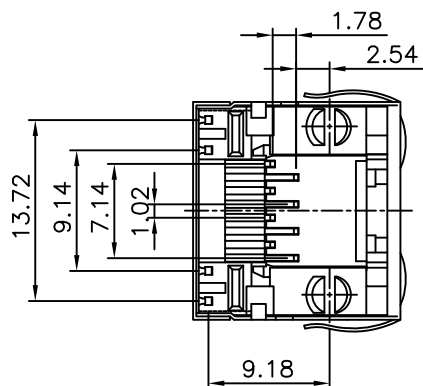
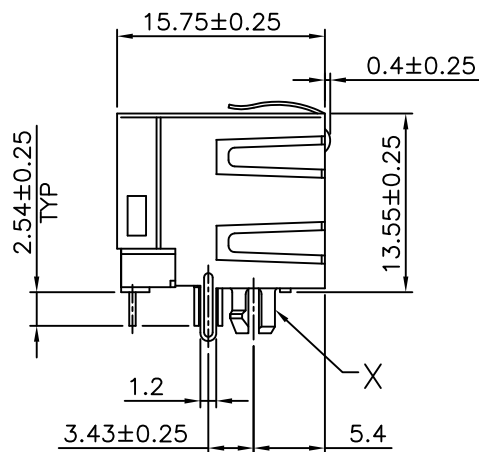



DETAIL X

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V—0
- CONTACTS—0.35mm THICK PHOS—BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

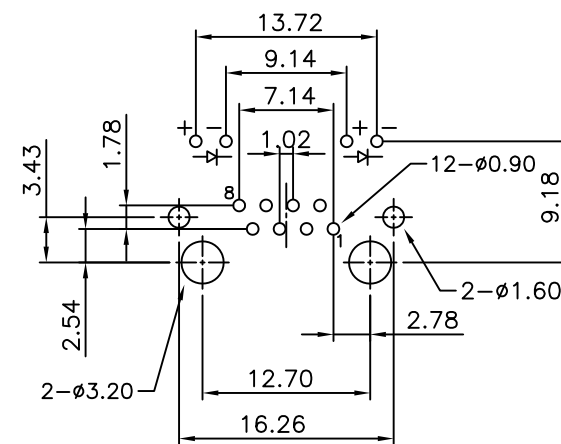

PCB LAYOUT (TOP VIEW)
RECOMMENDED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJF13UL-KF50B3GY-0808

SERIES

8P8C

BLACK

FULL SPRING

LED1 / LED2

GREEN / YELLOW

REAR TAB 3.43mm

50u" GOLD

DESCRIPTION: RJ45, W/O LED FLAT PIN, SIDE ENTRY JACK