


DETAIL X

MATERIAL:  
 · HOUSING—DSM STANYL TE250F6 (NYLON-46)  
 HEAT DEFLECTION TEMP.290°  
 BLACK COLOR, UL94V-0  
 · CONTACTS—0.35mm THICK PHOS-BRONZE PLATED  
 WITH HARD GOLD AND GOLD FLASH IN  
 SOLDER AREA.  
 SHIELD—0.25mm THICK COPPER ALLOY,  
 PLATED WITH NICKEL.  
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
 PART 68,SUBPART F.

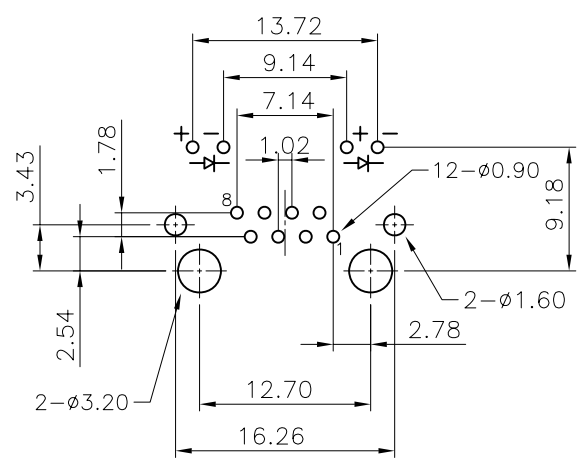

PCB LAYOUT (TOP VIEW)  
 RECOMMENDED

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY		X. ± .X ± 0.25 .XX ± 0.13 .XXX ± 0.05 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

MJF13UL-KT06B3GY-0808-LF  
 SERIES | | | | LEADFREE  
 | | | | 8P8C  
 | | | | LED1 GREEN/ LED2 YELLOW  
 | | | | REAR TAB 3.43mm  
 | | | | 06u" GOLD  
 | | | | TOP SPRING

DESCRIPTION: RJ45, W/O LED FLAT PIN, SIDE ENTRY JACK