


DETAIL X

MATERIAL:
 · HOUSING—DSM STANYL TE250F6 (NYLON-46)
 HEAT DEFLECTION TEMP.290°
 BLACK COLOR, UL94V-0
 · CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
 WITH HARD GOLD AND GOLD FLASH IN
 SOLDER AREA.
 SHIELD—0.25mm THICK COPPER ALLOY,
 PLATED WITH NICKEL.
 CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

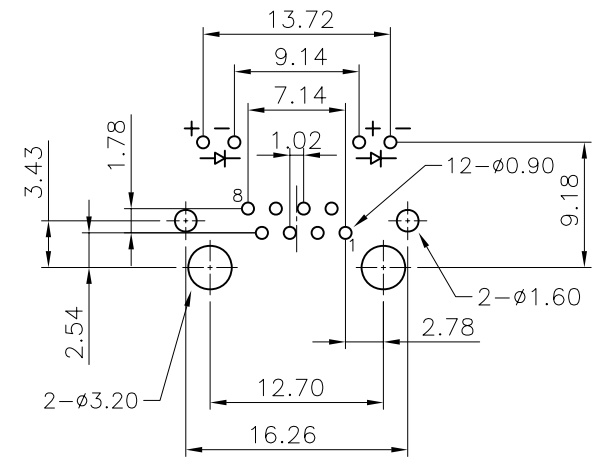

PCB LAYOUT (TOP VIEW)
 RECOMMENDED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X ± .X ± 0.25 .XX ± 0.13 .XXX ± 0.05 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

MJF13UL-KT50B3GY-0808-LF
 SERIES | | | | | LEADFREE
 | | | | | 8P8C
 | | | | | LED1 GREEN/ LED2 YELLOW
 BLACK | | | | | REAR TAB 3.43mm
 | | | | | 50u" GOLD
 | | | | | TOP SPRING

DESCRIPTION: RJ45, W/O LED FLAT PIN, SIDE ENTRY JACK