


**MATERIAL:**

- HOUSING—DSM STANYL TE250F6 (NYLON-46)  
HEAT DEFLECTION TEMP.290°  
BLACK COLOR, UL94V-0
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED  
WITH HARD GOLD AND GOLD FLASH OR  
GOLD FLASH IN SOLDER AREA.
- SHIELD—0.25mm THICK COPPER ALLOY,  
PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS  
PART 68,SUBPART F.

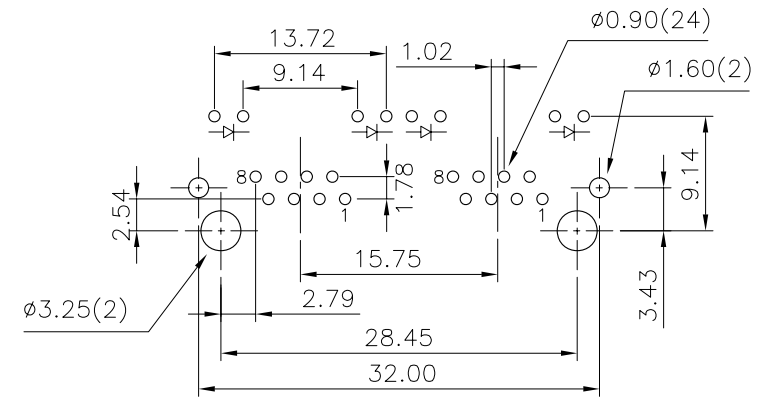

PCB LAYOUT (Ref.)

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

焯倫股份有限公司

PART NO. MJF13ULA2-KX06B3xx-0808

DWG NO. MJF13ULA2-KX06B3xx-0808

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

**RoHS Compliant**

TOLERANCES ARE

.X ± 0.25

.XX ± 0.13

.XXX ±

ANG

DESCRIPTION:

2PORTS, 8POSITION, WITH LED'S  
SHIELDED, SIDE ENTRY PCB GANGED JACK

AREA

REVISIONS

HK

DATE