

PCB LAYOUT (Ref.)

- MATERIAL:
- HOUSING—DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
 - CONTACTS—0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
 - SHIELD—0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT/ mm SCALE 1:1

.XX ±


DATE

.XXX ±

ANG ±


SIZE A4

PJECTION



ORDER INFORMATION

MJF13ULA4-KF06B3xyyy-0808

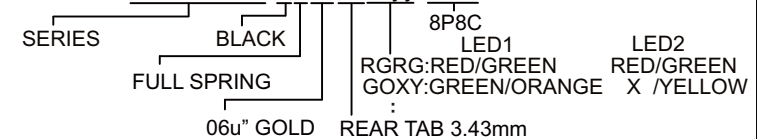

DESCRIPTION: 4PORTS, RJ45, WITH LED'S SHIELDED, SIDE ENTRY PCB GANGED JACK

煜倫股份有限公司

www.morethanall.com