

SPECIFICATIONS


MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating
4. Shield : 0.25mm Thickness Copper Alloy With Nickel Plated


ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

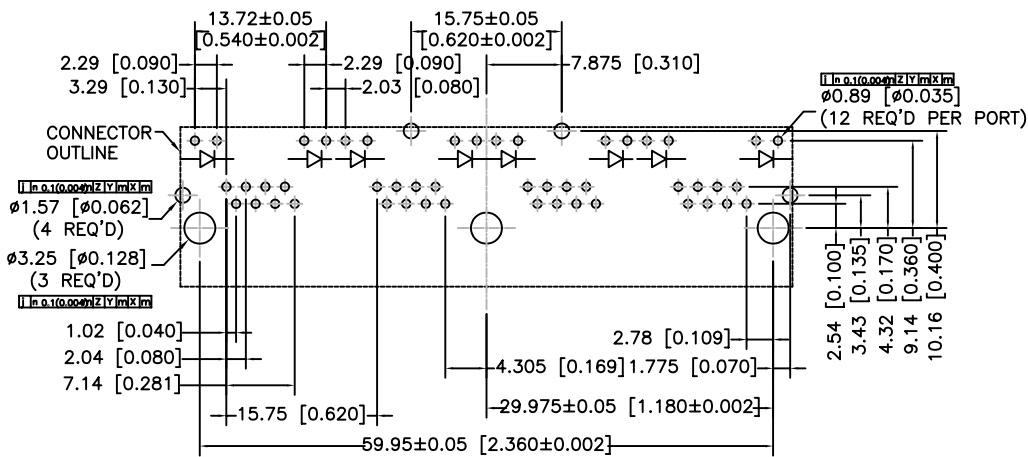

PCB LAYOUT/TOP VIEW

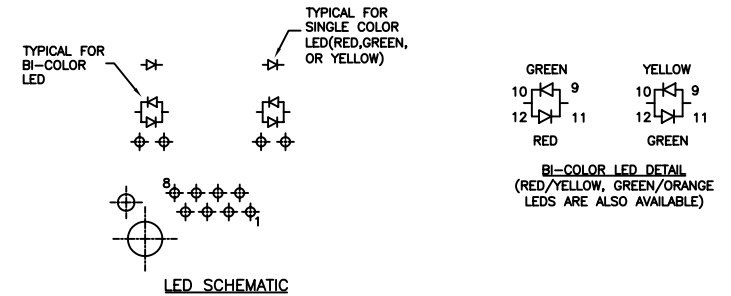

LED Color Options Table

LED Color Options		LED DASH OPTION
Position 2(Left)	Position 1(Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XXX±

DATE

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

MJF13ULA4-KF15B3YG-0808-LF

SERIES | | | | | LEAD FREE
BLACK | | | | | 8P8C
15u" GOLD | | | | | YELLOW / GREEN
FULL SPRING | | | | | REAR TAB 3.43mm

DESCRIPTION: RJ45 Side Entry Shielded Gang Jack W/LED

煜倫股份有限公司

www.morethanall.com