

PANEL GROUND MODE

SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing (Option) :

PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C

Nylon (UL 94V-0), Soldering Temperature:260°C

Color : Black Color


Spring Wire :

0.35mm Thickness Phosphor bronze Gold Plating Over Nickel

Shielded : Brass Plating Nickel

Temperature Range : - 40°C / +85°C

Durability : 500 Mating cycles Min.

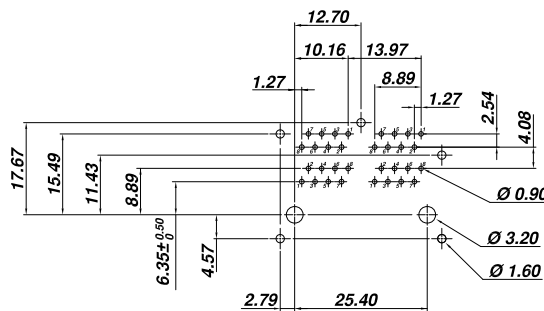

PCB LAYOUT
(Top View)

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MJF25B2-KF06A4M1-0808

DWG NO. MJF25B2-KF06A4M1-0808

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

- .X ±
- .XX ±
- .XXX ±
- AWG

DESCRIPTION: **DOUBLE DECK GANG PCB JACK**

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE