

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125VAC RMS.
2. CURRENT RATING:1.5AMP.
3. CONTACT RESISTANCE:42MILLIOHMS MAX.
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH:1000 VDC RMS 60HZ. 1MIN.


MECHANICAL:

1. HOUSING MATERIAL:NYLON 66, UL94V-0.
2. CONTACT MATERIAL:PHOSPHOR BRONZE ϕ 0.46mm.
3. PLATING:GOLD PLATING OVER NICKEL.
4. OPERATING LIFE:750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER:1 LB MIN.
6. PCB RETENTION POST-SOLDER:10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE:-40°C TO 85°C.
2. OPERATION:0°C TO 70°C.

PORT NO.	DIM "A"	DIM "B"	DIM "C"
MJF25B2-KX03A4-0808	31.10	25.40	13.97
MJF25B4-KX03A4-0808	59.10	53.34	41.91
MJF25B6-KX03A4-0808	87.10	81.28	69.85
MJF25B8-KX03A4-0808	115.10	109.22	97.74

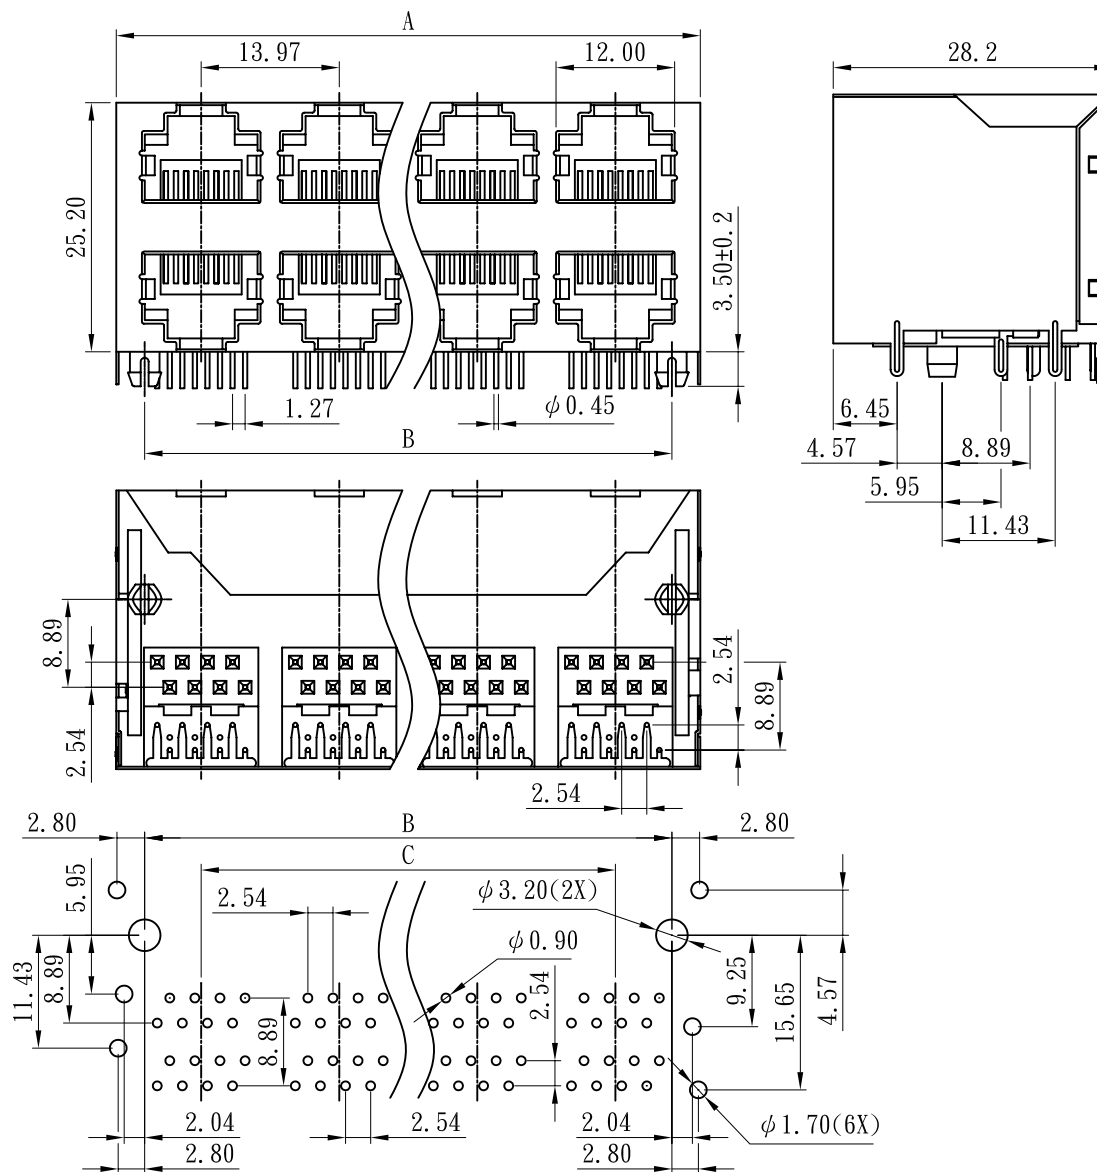

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

MJF25Bx-KX03A4-0808-LF

SERIES

LEADFREE

8P8C

FRONT TAB 4.57mm

03u" GOLD

NON EAR

BLACK

2~8 PORTS

DESCRIPTION: TELEPHONE JACK 雙層